

# Specifications

备注(Remark)

## 1. 材料(MATERIAL)

胶芯: PA9T30%G.F UL94V-0, 颜色: 黑色

Housing: PA9T+30%G.F UL94V-0, Color: Black

四方针: 特殊铜, 镍底50u"MIN, 表面镀高温雾锡120u"MIN

Square needle: Red copper, 30U "Min nickel bottom, High Temperature Matt Tin 120u"MIN

## 2. 特性 (characteristics):

额定电流: 5 AMP

Raring Current: 5 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.


Withstanding Voltage: AC 500V.

温度范围: -40℃ to+105℃





Temperture Range: -40℃ to+105℃

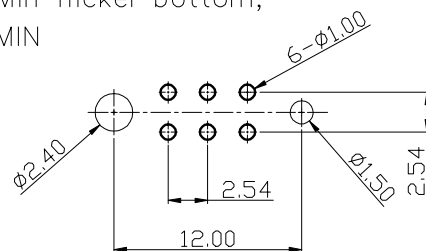

P.C.B LAYOUT

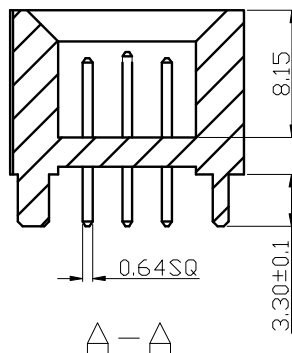

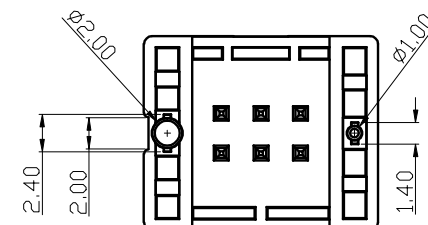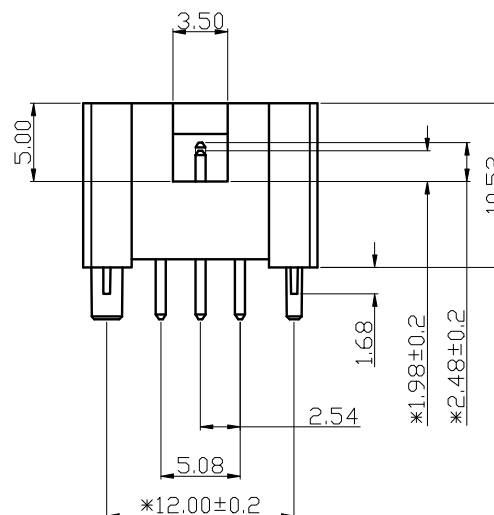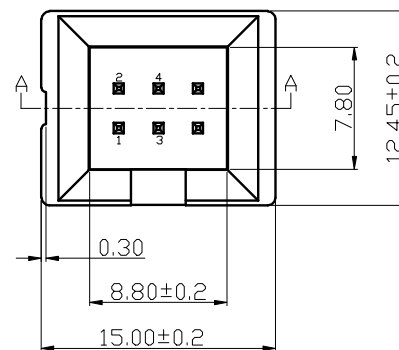

A-A



客编:

注意事项

1. 单PIN保持力最小1.36kg
2. 第1、2、4、5、6P针长 L=10.8mm  
第3P针长 L=11.3mm
3. 带\*为品管检验尺寸。

					OPERATION		SCALE		Fit				
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN		PART NO.	AN106S4CSBE3	
					X.XXX	±0.10							
					Angle	±3°							
							SHEET	1/1	CHECK		TITLE:	2.54筒牛 型高10.5 6P 高温雾锡 PA9T料 180度 带柱 盒装	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	