

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

A

B

E

F

G

H

1

A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
L

A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
L

A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
L

A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
L

A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
L

A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
L


A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
L

A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
L






A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
L



A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
L

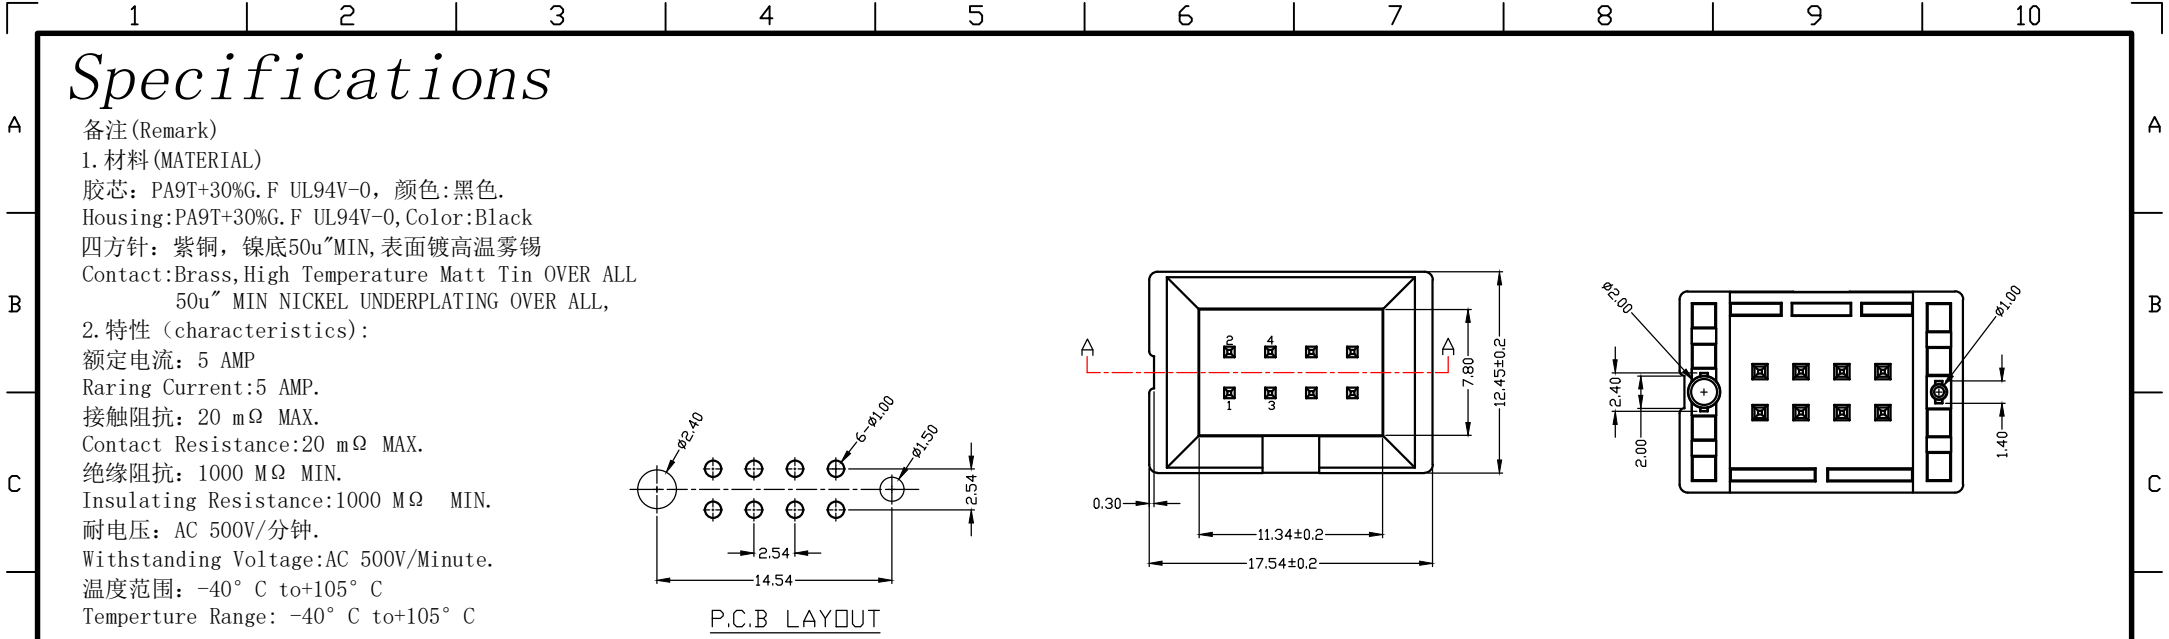A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
L

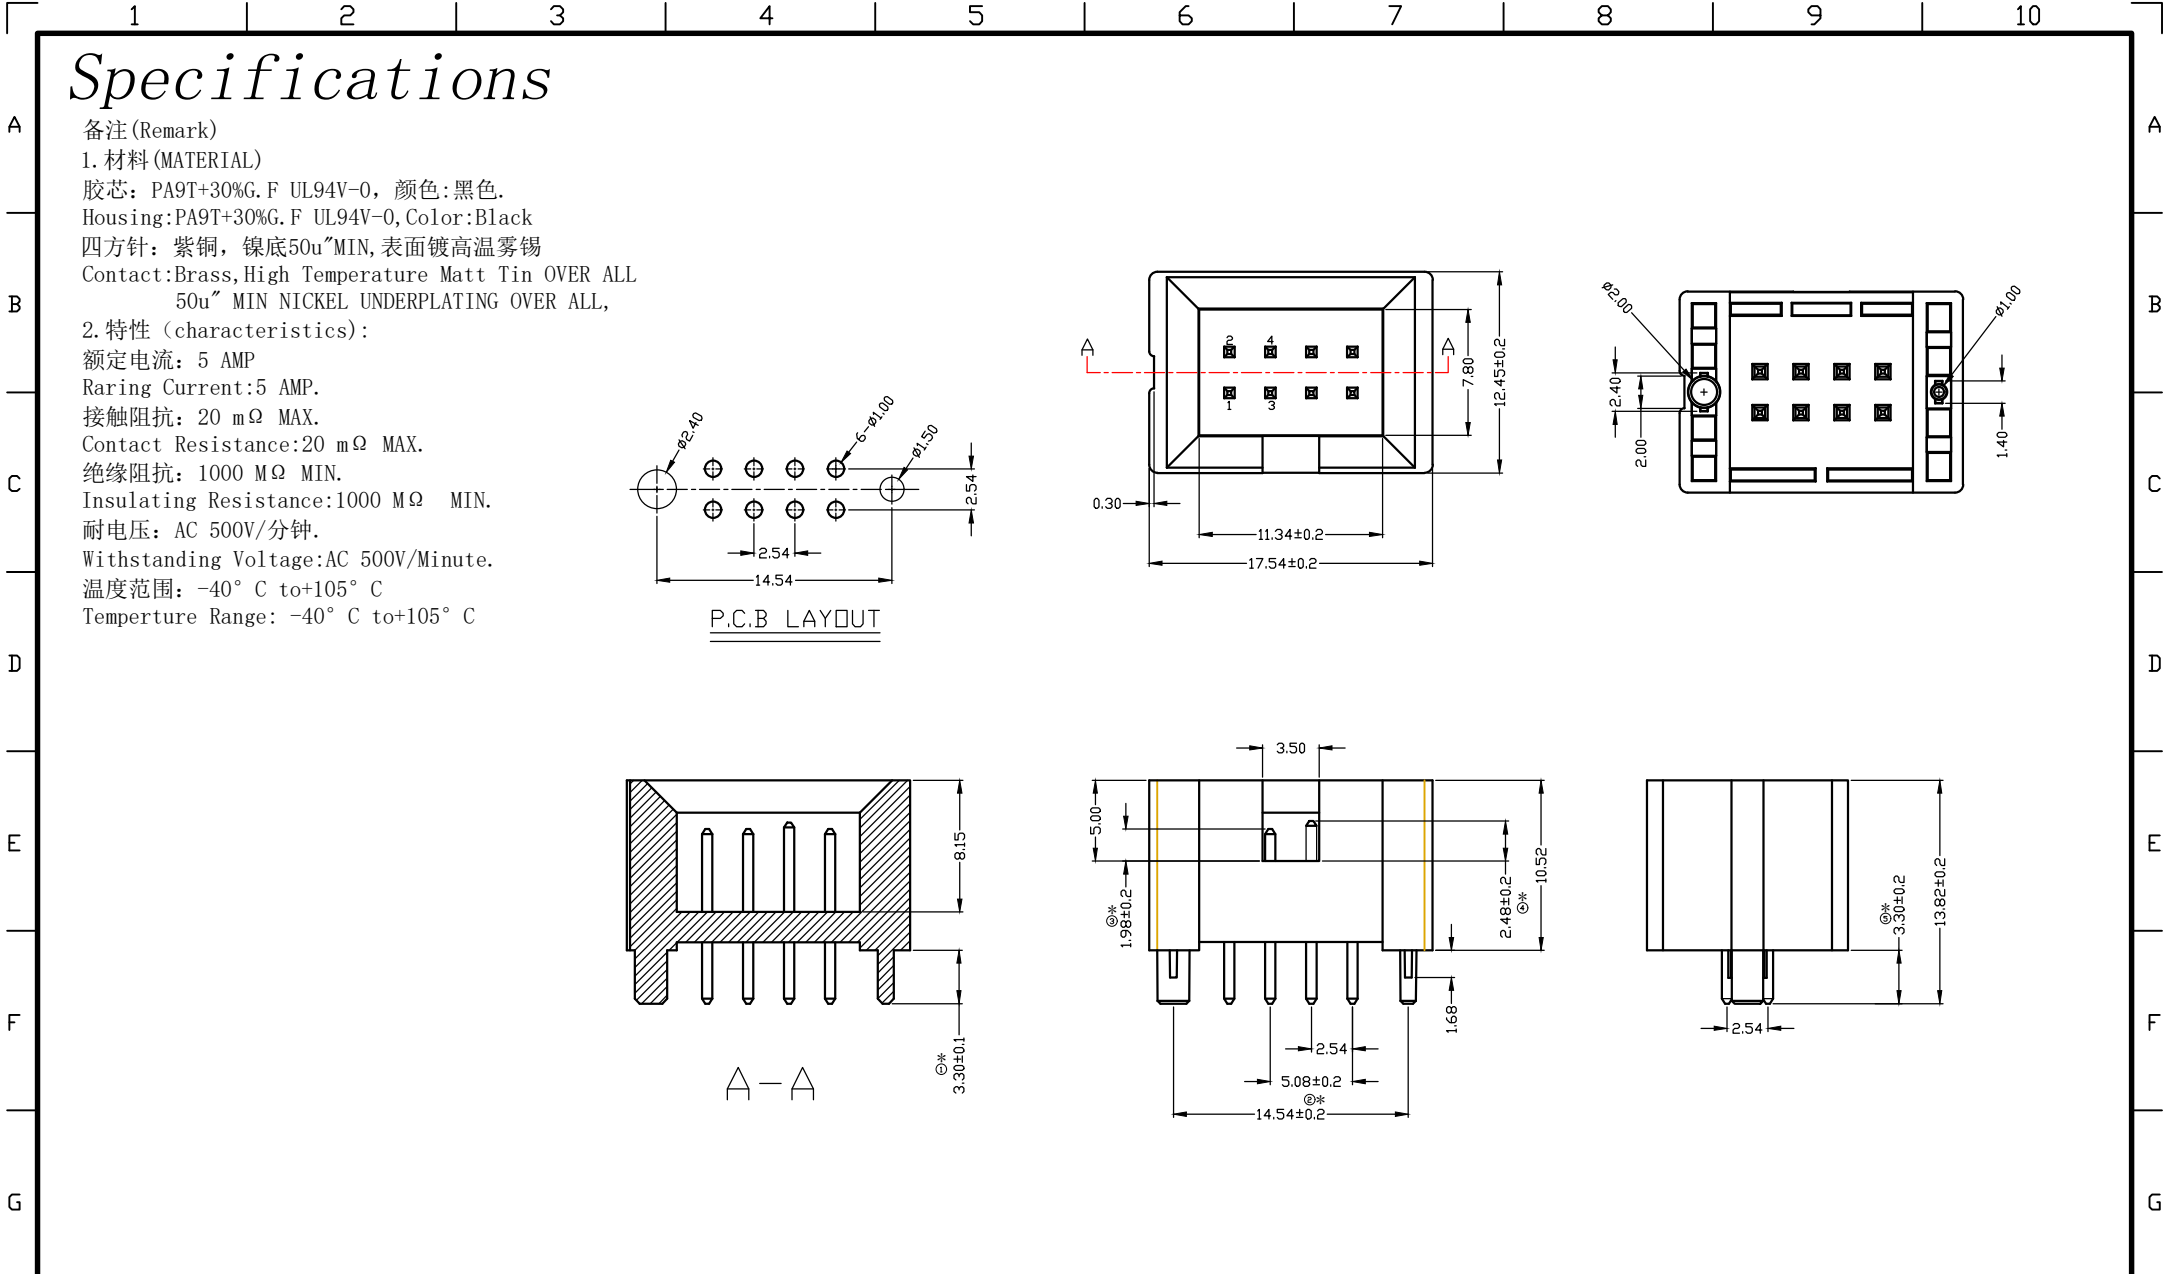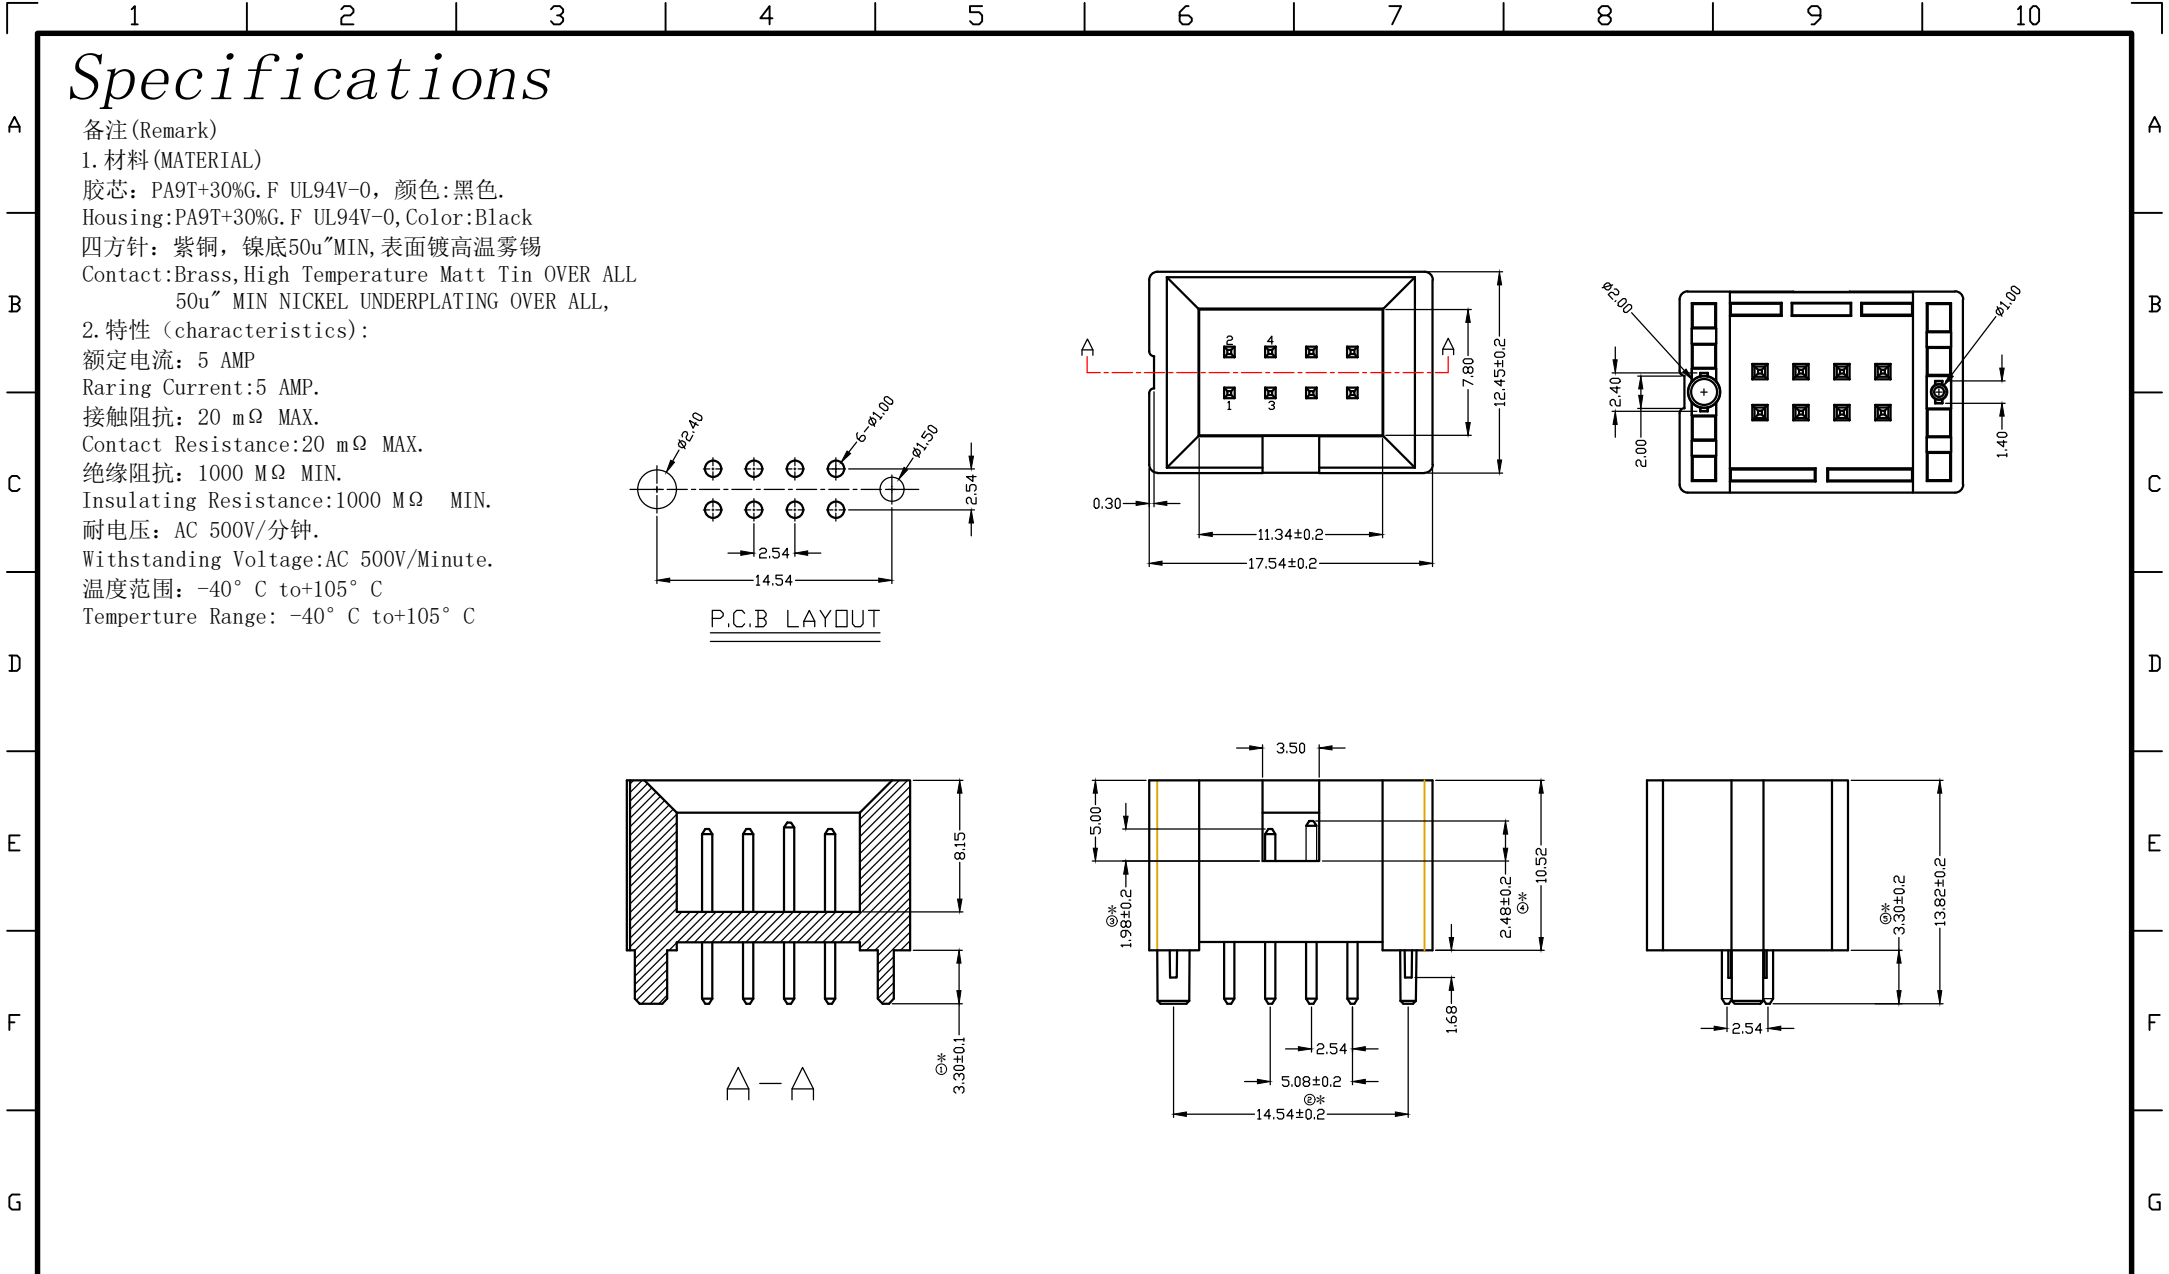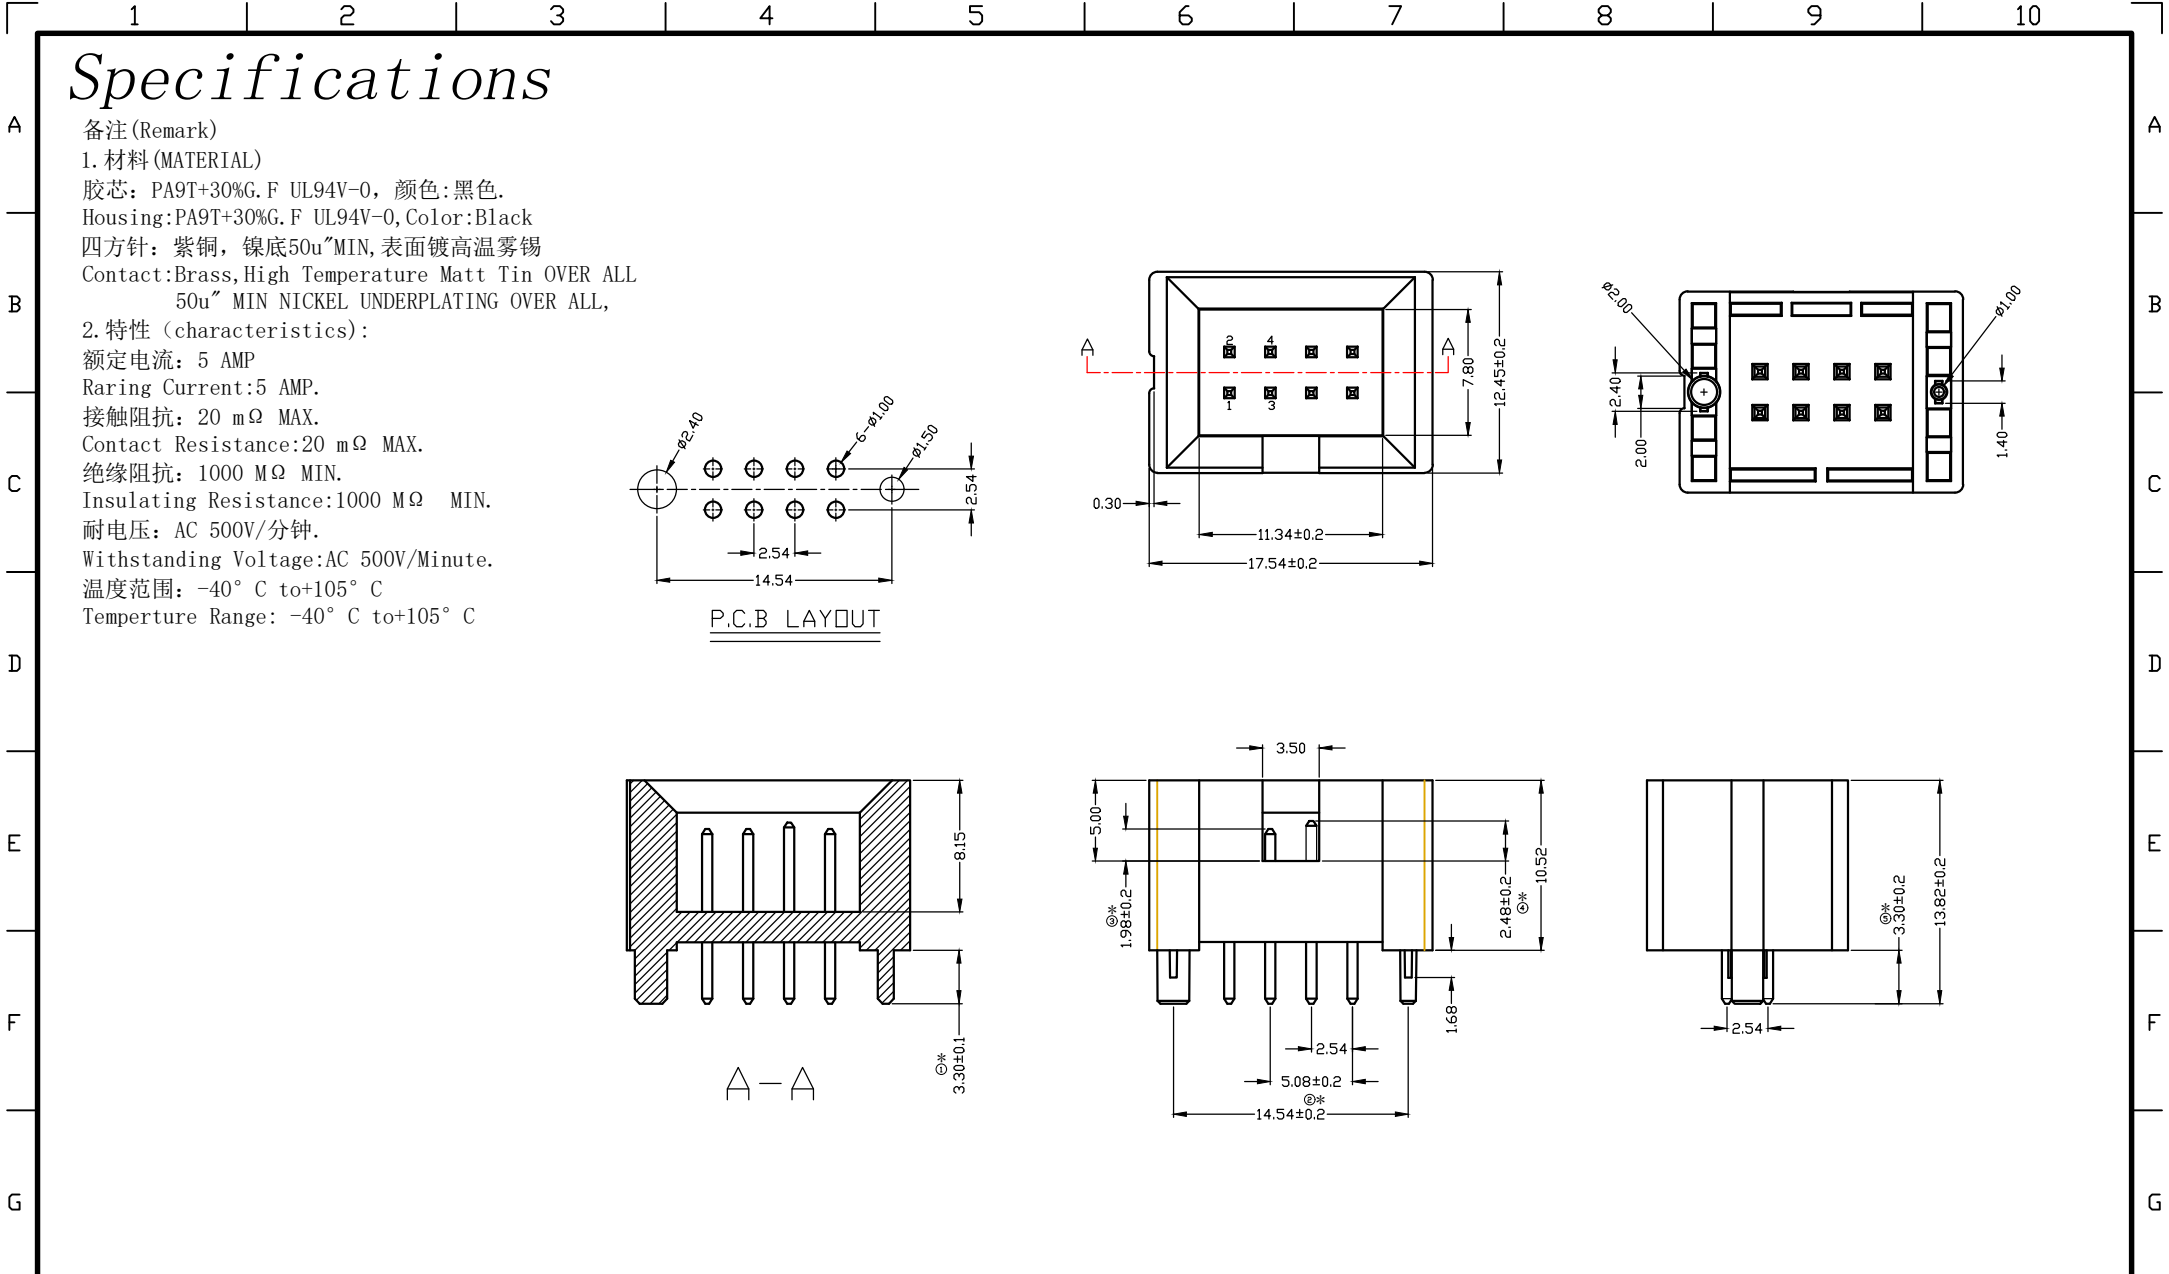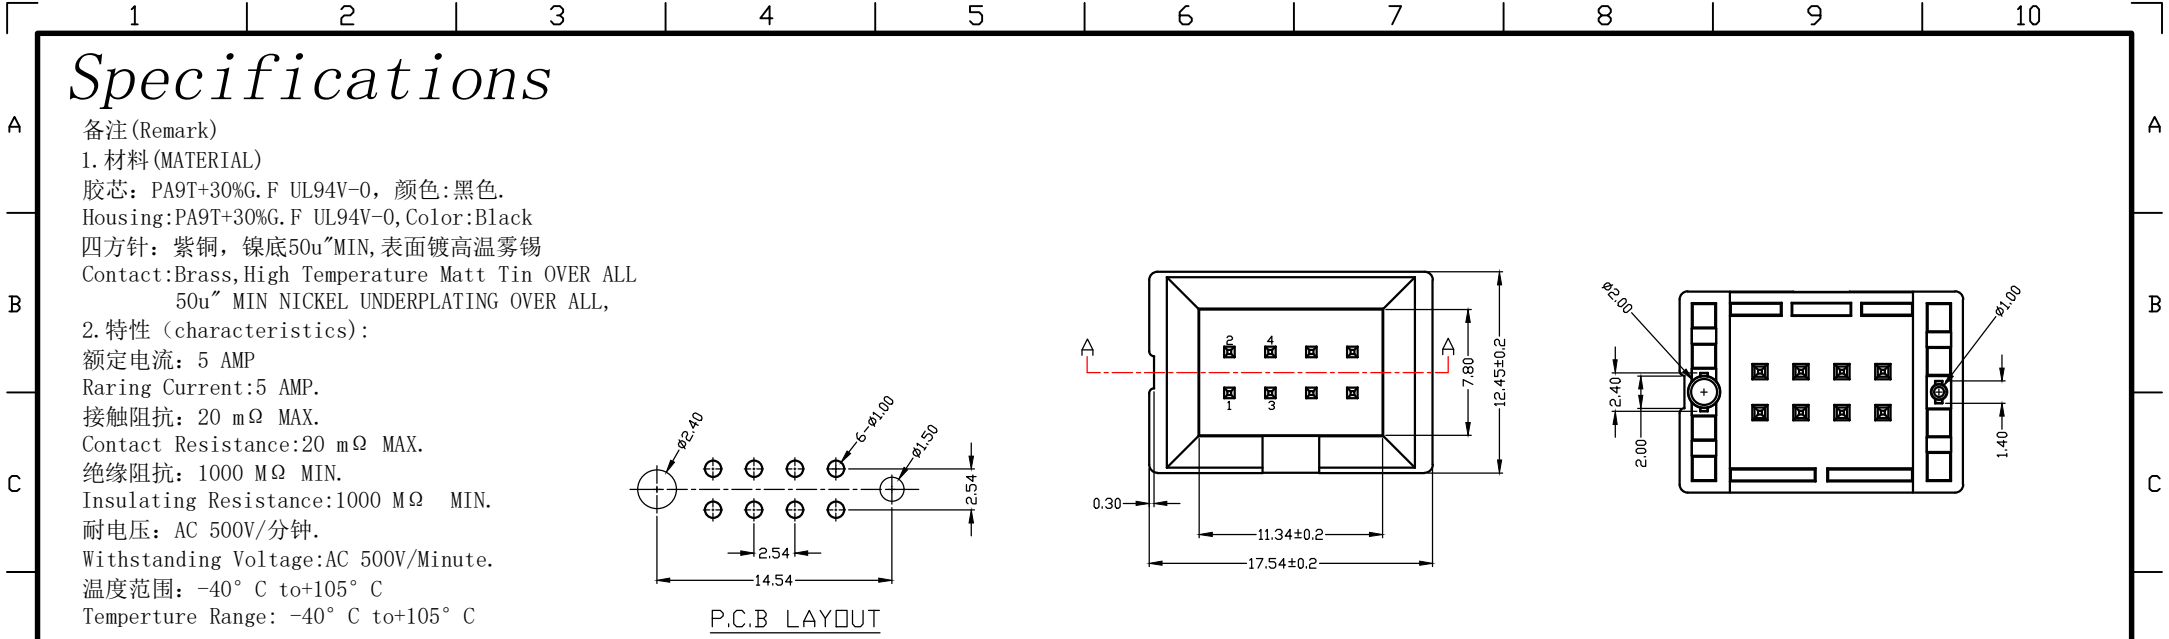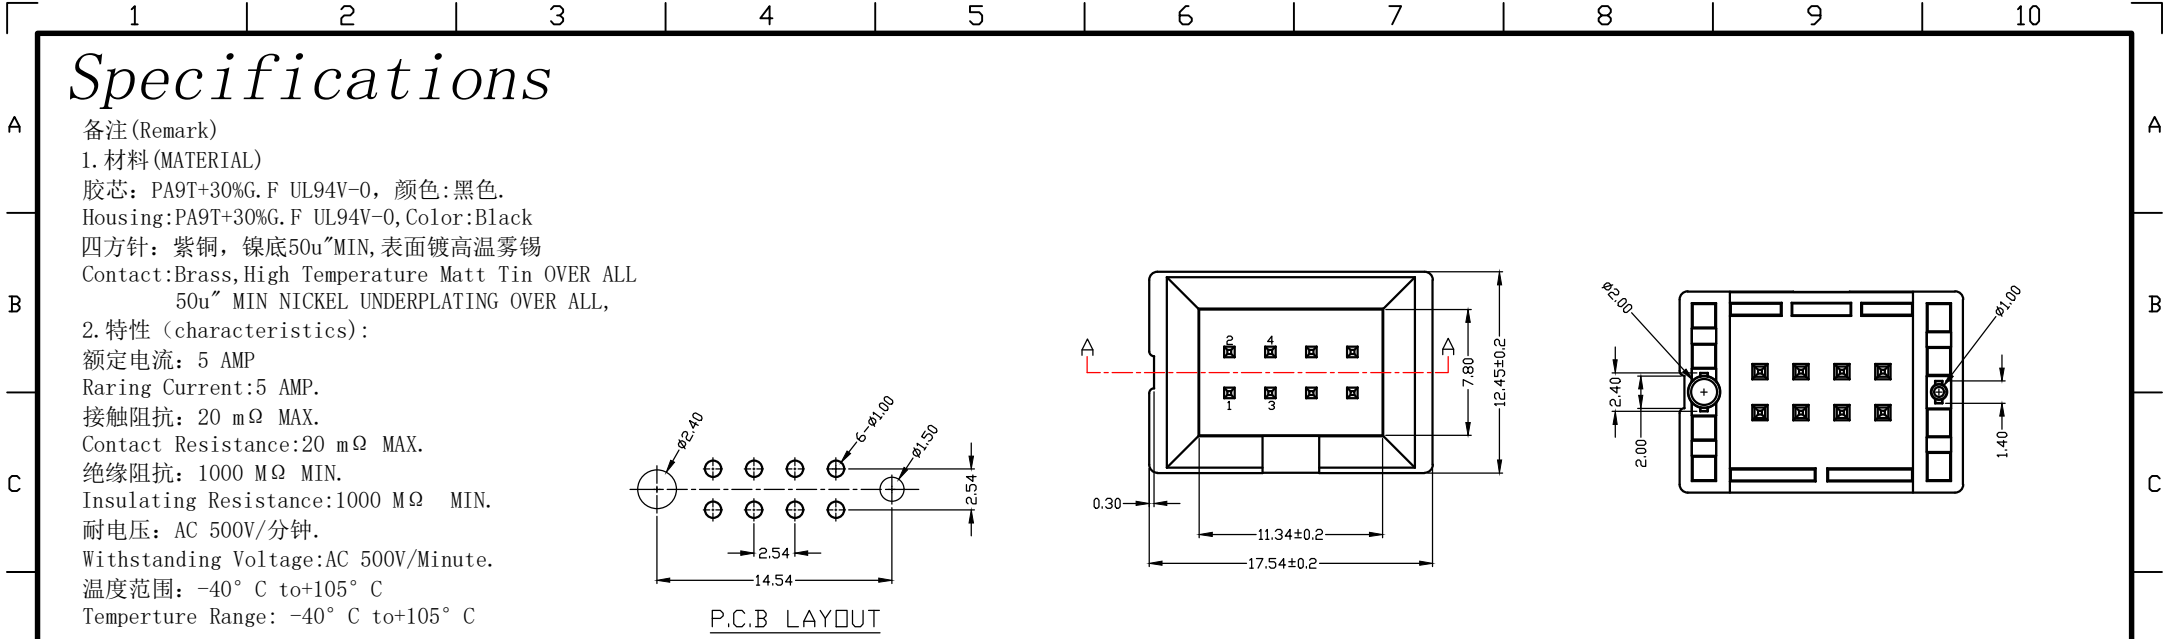

	1	2	3	4	5	6	7	8	9	10	
A	<h1>Specifications</h1> <p>备注(Remark)</p> <p>1. 材料(MATERIAL)</p> <p>胶芯: PA9T+30%G.F UL94V-0, 颜色:黑色. Housing:PA9T+30%G.F UL94V-0, Color:Black 四方针: 紫铜, 镍底50u"MIN, 表面镀高温雾锡 Contact:Brass,High Temperature Matt Tin OVER ALL 50u" MIN NICKEL UNDERPLATING OVER ALL,</p> <p>2. 特性(characteristics):</p> <p>额定电流: 5 AMP Raring Current:5 AMP. 接触阻抗: 20 mΩ MAX. Contact Resistance:20 mΩ MAX. 绝缘阻抗: 1000 MΩ MIN. Insulating Resistance:1000 MΩ MIN. 耐电压: AC 500V/分钟. Withstanding Voltage:AC 500V/Minute. 温度范围: -40° C to+105° C Temperture Range: -40° C to+105° C</p> <div style="display: flex; justify-content: space-around;"><div><p>P.C.B LAYOUT</p></div><div></div><div></div></div>										A
B											B
C											C



H							OPERATION		SCALE		Fit								H
							X.X	±0.25	UNIT		MM								
							X.XX	±0.20	SIZE	A4	DESIGN	周芳杰	PART NO.	AN1108S4CSBE1					
							X.XXX	±0.10											
							Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.54*10.5筒牛 8P 紫铜四方针 180度 带柱 黑色 PA9T料 高温雾粉 第1.2.3.4.5.7.8P 针长L=10.8mm 第6P针长 L=11.3mm 盒装					
	REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE							