

SECTION A-A

TABLE:

AW020D4103601	J.DBATHDBKD030	BATTERY HOLDER BLACK(电池座黑色)
AW020D4103602		BATTERY HOLDER FLUORESCENCE(电池座荧光黄)
PART NUMBER	PART NUMBER	PART NAME

DIM	TOL	DIM	DEG
X.	$\pm 0.30$	X°	$\pm 3^\circ$
X.X	$\pm 0.25$	X.X°	$\pm 2^\circ$
X.XX	$\pm 0.15$	X.XX°	$\pm 1^\circ$
X.XXX	$\pm 0.05$	X.XXX°	$\pm 0.5^\circ$

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A			初版发行	07/09/12	LEIXINHUA

NOTES:

MATERIAL:

HOUSING:PBT+25%G/F,UL94V-0,COLOR:SEE TABLE.

CONTACT:BRASS.

FINISH:

CONTACT:TIN PLATED ALL OVER.

50u" MIN. NICKEL UNDERPLATED ALL OVER.



SPECIFICATION:

CURRENT RATING:1 AMP. MAX.

DIELECTRIC WITHSTAND VOLTAGE:600V AC R.M.S. FOR 1 MINTUE.

INSULATION RESISTANCE:1,000MΩ MIN.AT 500V DC.

OPERATING TEMPERATURE:-55°C TO +105°C.

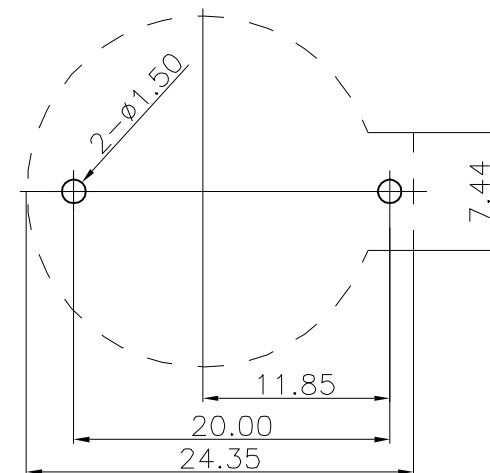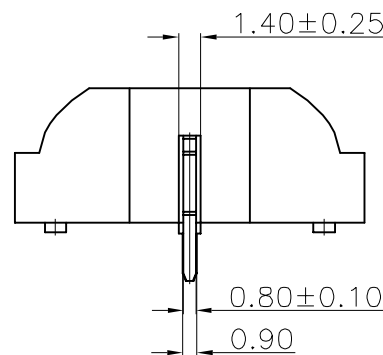

RECOMMENDED PC BOARD LAYOUT  
TOLERANCE:  $\pm 0.05$



DRAW NO.	W-07-0703	DATE	MATERIAL: SEE NOTES	DRAW NAME:
DESIGN:	LEIXINHUA	07/09/12	FINISH: SEE NOTES	BATTERY HOLDER SREIES ASS'Y
CHECK:			FILE:	
REVIEW:			P/N NO. SEE TABLE	MODEL:
APPROVED			REV. A SCALE N/A	UNIT: mm SHEET: 1/2