
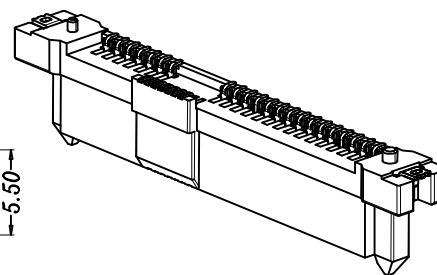

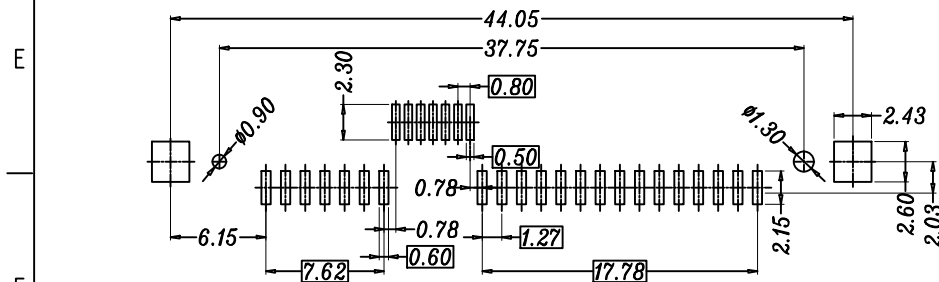
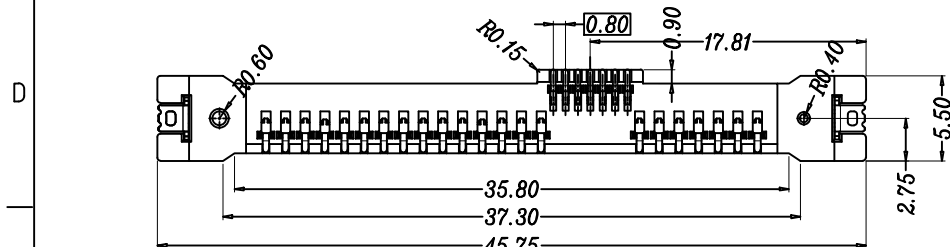
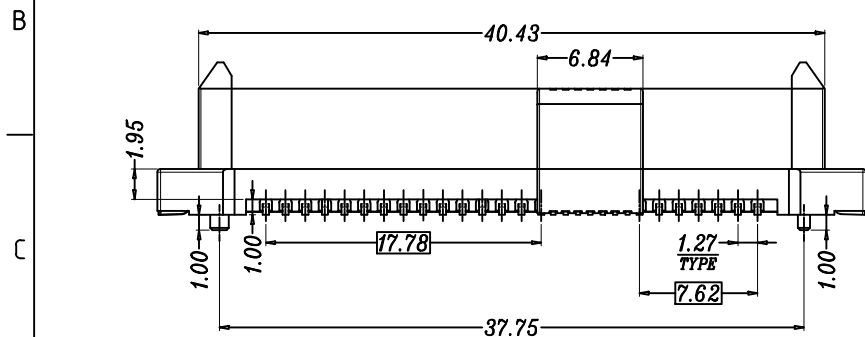


REV	DESCRIPTION	DATE
△	原裝??	140925

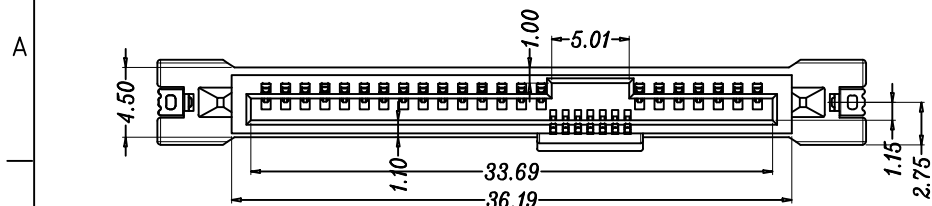

NOTE:

1.MATERIAL:

HOUSING: LCP 30% G/F UL 94V-0 ;BLACK
COVER: LCP 30% G/F UL 94V-0 ;BLACK
CONTACT(1.27): C5191R-H,T=0.30±0.01mm
CONTACT(0.8): C5191R-H,T=0.25±0.01mm
PEG: C2680R-H,T=0.30±0.01mm

2.MECHANICAL:

MATING: 25N MAX.
WITHDRAWAL FORCE: 5N MIN.
DURABILITY: 500 CYCLES.

3.ELECTRICAL:



CURRENT RATING: 1.5 A
CONTACT RESISTANCE:30 Milliohms MAX.
INSULATION RESISTANCE: 1000 Megohms MIN.
WITHSTANDING VOLTAGE: 500 VAC

4.FINISH:

CONTACT: 15 u" GOLD MIN. PLATING ON CONTACT AREA
100u"MIN. TIN PLATING ON SOLDER TAILS
50u" MIN. NICKEL UNDERPLATING OVER ALL
PEG:100u" MIN. TIN PLATING ON SOLDER AREA
50u" MIN.NICKEL UNDERPLATING OVER ALL

5.ENVIRONMENTAL:

OPERATURE RANGE:-25°C TO +85°C

QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)				SCALE: 1:1	NUMBER:		
*0		MM		MM	MATERIAL:	HRC:	TITLE: 12G SAS 29PIN SMT 15U		
	.X	±0.10	X.°	±---	DRAWN BY KINGSER 070321				
	.XX	±0.05	.X°	±---					
	.XXX	±0.03	.XX°	±---	CHECKED BY DATE		 THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	ANGULAR±1°				APPROVED BY DATE				
C*0	DRAFT WHERE APPLICABLE				PART NO A801300290001		MOULD NO --	SHEET NO 1/1	
	MUST REMAIN WITHIN DIMENSIONS				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO AIT INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

CONSHARE