

4

3


2

1


PART NO. SEE TABLE

REVISIONS




LTR	DESCRIPTION	Drawing	DATE
C	新增鐵殼無LOGO料號	BILL	05/11/09
D	依客戶要求增加MYLAR	BILL	08/31/09
E	新增鍍全金料號	BILL	09/09/09
F	變更主體定位柱尺寸 (ECN2010091101)	QING	09/11/10

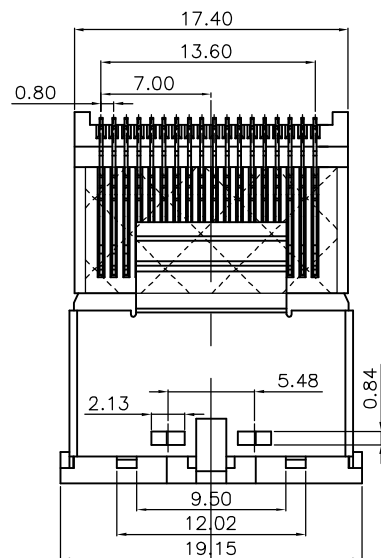

有&無COVER

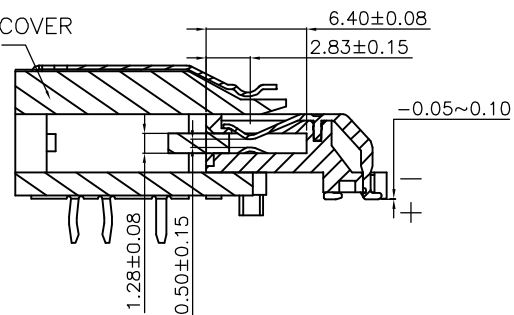

SECTION A-A

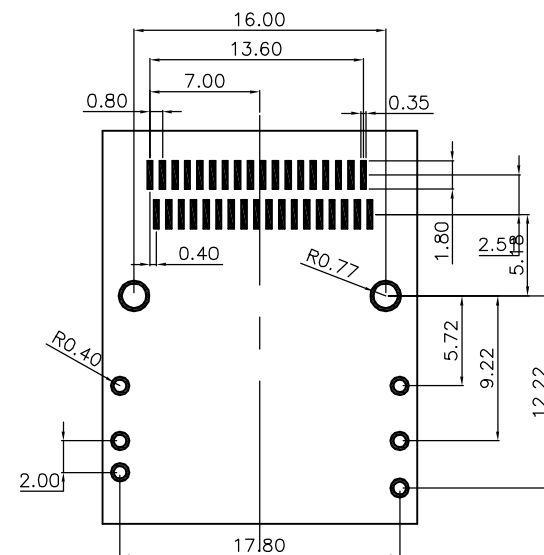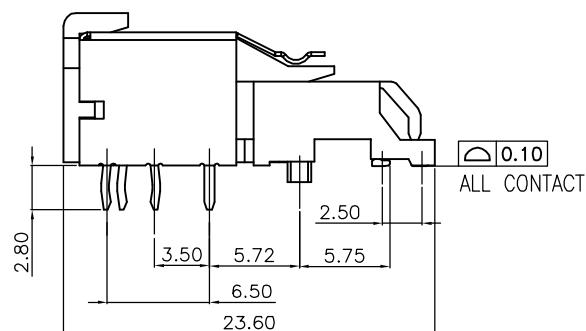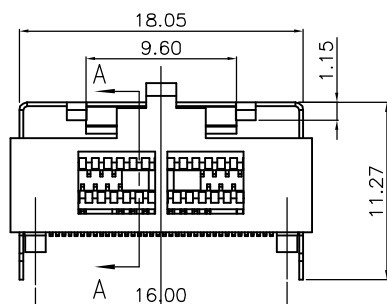

RECOMMENDED PCB LAYOUT

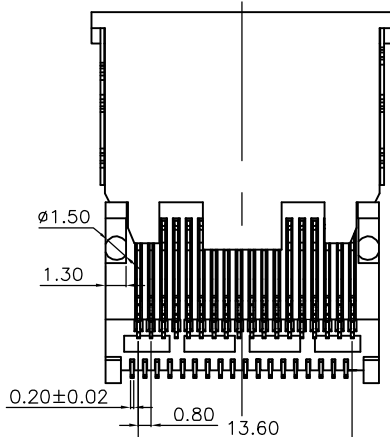


TABLE 1

A8087RA00101U	1U"	LCP BLACK	無logo
A8087RA100406	15U"	LCP BLACK	無logo
PART NO.	PLATED	PLASTIC&COLOR	NOTE

NOTE:

1.MATERIAL :

BASE: HIGH THERMOPLASTIC UL94V-0, COLOR : BLACK
TERMINAL: COPPER ALLOY, T= 0.20 mm
SHELL:STEEL,T=0.25mm.


2,PLATING:

CONTACT:GOLD PLATED ON THE CONTACT.
TIN PLATED ON THE SOLDER TAIL.
NICKEL UNDERPLATED OVER ALL.
SHELL:NICKEL UNDERPLATED OVER ALL.

3.ELECTRONICAL SPECIFICATION:

CURRENT RATING: 0.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 20 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 300 VAC.
OPERATING TEMPERATURE: -25°C~+85°C

4.THE PRODUCT SHOULD BE GP COMPLIANCE.

DIMENSION ARE MILLIMETERS TOLERANCES ARE : DECIMALS .X ± 0.20 .XX ± 0.15 ANGLE: X ± 1° DO NOT SCALE DRAWING	APPROVALS		DATE				
	DRAWN	QING	09/11/10	TITLE: SAS 36P 90° SOCKET SMT TYPE			
	CHECKED						
	APPROVALS						
				SIZE mm	SCALE : 1 : 1	DRAWING NO. 000542	REV. F
			ID NO.	A8087RAXXXXXX		SHEET 1 OF	

NO

QTY

UNIT