

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP BLACK,UL94V-0.
- 1.2 CONTACT: C7025,GOLD (SEE P/N) PLATED
IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA,
50u" MIN. NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING:12A;
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/MINUTE.
- 2.3 CONTACT RESISTANCE: 20mΩ MAX.
- 2.4 INSULATION RESISTANCE: 1000MΩ MIN.
- 2.5 OPERATION TEMPERATURE:-40°C TO +105°C.






3.ORDER INFORMATION:



AAH1 XXX S6 164 C

Pin数码 SEE TABLE
端子电镀: S6=3u" Glod
S5=15u" Gold
S3=30u" Glod
塑胶高度: 164=16.4mm
包装方式: C=TRAY



TABLE1:

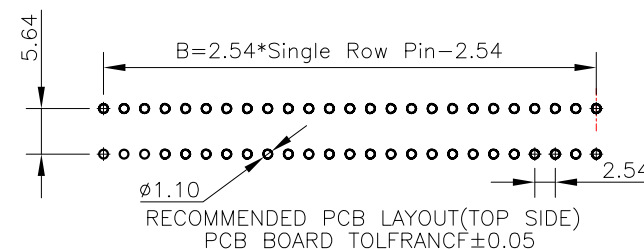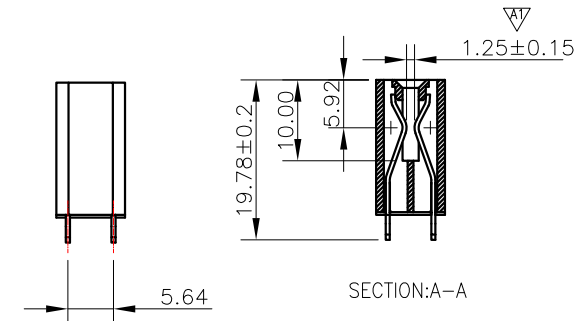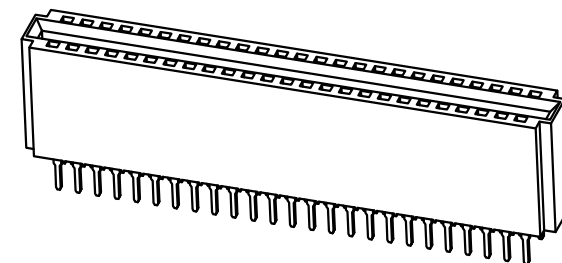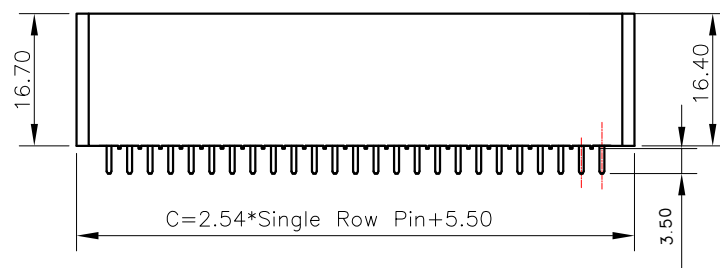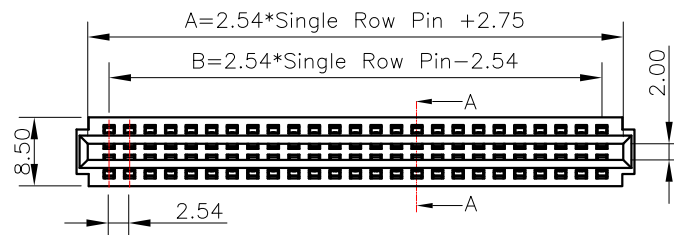No. OF PIN	A	B	C
012=2x6PIN	17.99	12.70	20.74
020=2x10PIN	28.15	22.86	30.90
032=2x16PIN	43.39	38.10	43.60
050=2x25PIN	66.25	60.96	69.00





					OPERATION		DRAW		FDL		2019.08.30					
					X.X	±0.40	DESIGN		Jensen		2019.08.30					
					X.XX	±0.25	CHECK		Jack		2019.08.30		SIZE	A4	PART NO.	AAH1XXXS6164C
A0		NEW	—	—	X.XXX	±0.15	APPROVE		Andy		2019.08.30		SHEET	1/2	TITLE:	SLOT PITCH 2.54 CONNECTOR直立式DIP
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.		DRAW NO.	SP-032		

客户图





10盘用PE膜绑十字型

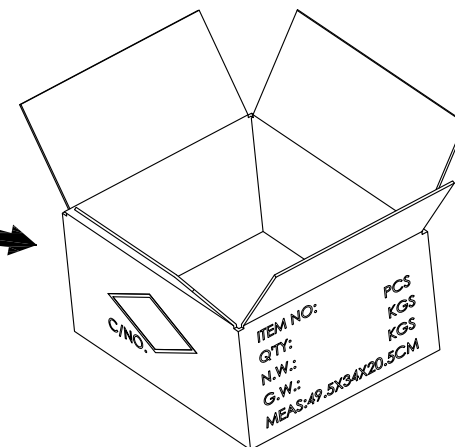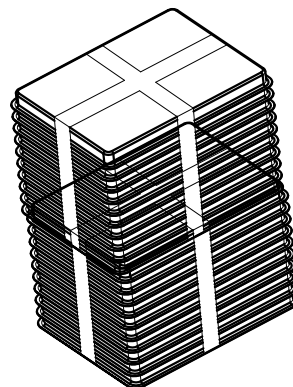

要求:

1. 真空盒420*380*15.0, 不可有破损, 50PCS/盒。
2. 纸箱450*410*350, 材质: K=K, 不可有破损, 加装防水PE袋及干燥剂。
(20*50PCS/盒=1000PCS/箱)
3. 将装好产品的10个真空盒整齐叠放在一起, 共两叠1000PCS, 放入纸箱中, 用封箱胶纸封好纸箱。
4. 每箱产品净重15.2kg, 毛重: 16kg。

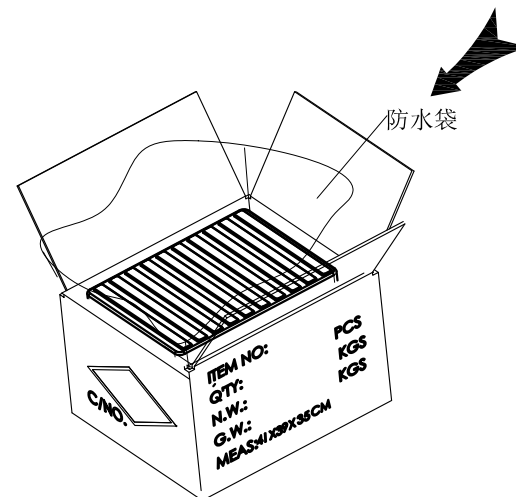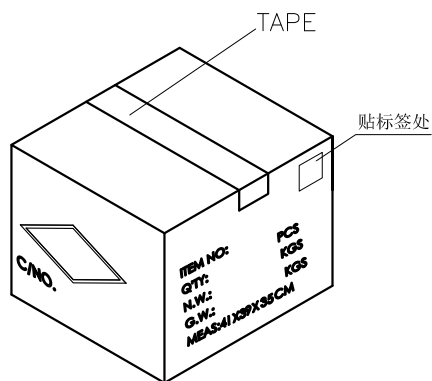

					OPERATION		DRAW	FDL	2019.08.30				
					X.X	±0.40	DESIGN	Jensen	2019.08.30				
					X.XX	±0.25	CHECK	Jack	2019.08.30	SIZE	A4	PART NO.	AAH1XXXS6164C
					X.XXX	±0.15	APPROVE	Andy	2019.08.30	SHEET	2/2	TITLE:	SLOT PITCH 2.54 CONNECTOR直立式DIP包装图
AO		NEW			Angle	±3°				PROJ.		DRAW NO.	SP-032
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1			