

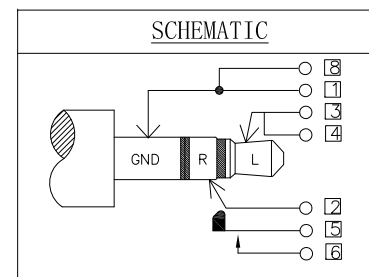
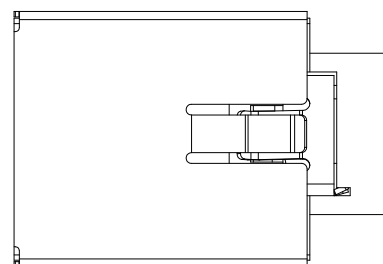
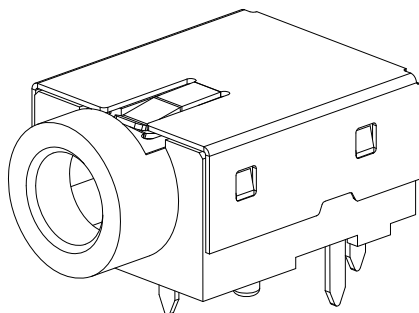
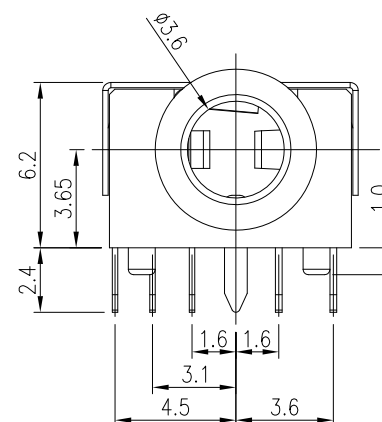
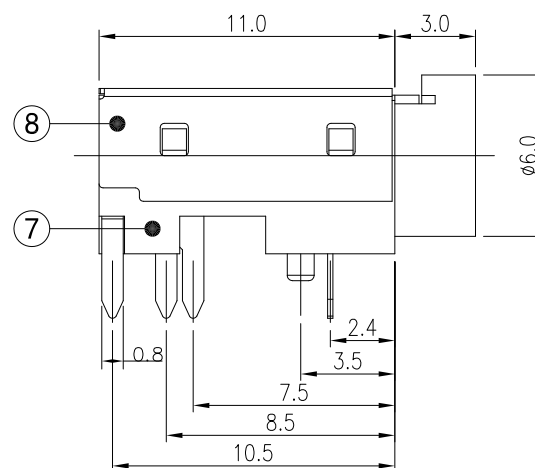


ZONE	SYMBOL	REVISION	APPROVAL	DATE



**P. C. B LAYOUT
TOP VIEW**

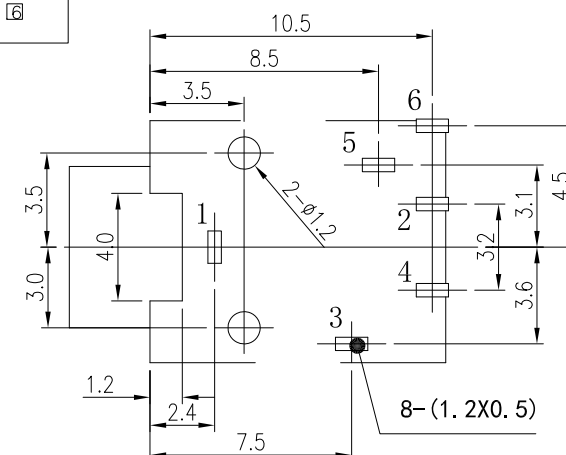


C1324B 08DX PPA

B:BLACK
P:PINK(#199C)
G:GREEN(#577C)

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

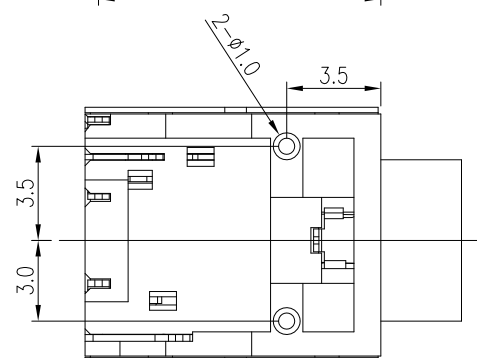

8	SHELL	1	SUS	
7	HOUSING	1	PA9T+30%GF, UL94 V-0	
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Matte Sn-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Matte Sn-Plating
4	CURVE PIECE	1	PHOSPHOR BRONZE	Matte Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Matte Sn-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Matte Sn-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Matte Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE SPECIFIED
DIMENSION ARE IN CENTIMETERs
TOLERANCE ARE :
FRACTION DECIMALS ANGLES
.X ± 0.3 X' $\pm 5'$
.XX ± 0.2 .X' $\pm 3'$
.XXX ± 0.1

3rd ANGLE PROJECTION

SCALE 1:1 UNIT mm SIZE A4

CNSHARE

APPROVALS DATE TITLE
DRAWN WANGWEI 2012/10/10 3.5mm AUDIO JACK
CHECKED JACK 2012/10/10 PART NO.
APPROVED TIRE 2012/10/10 C1324B08DXPPA