

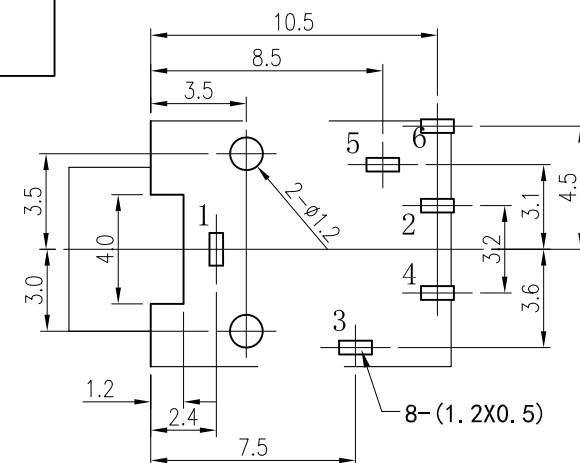
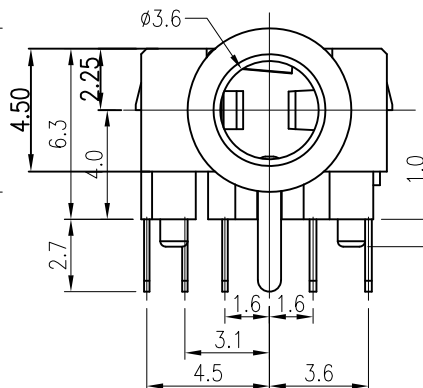
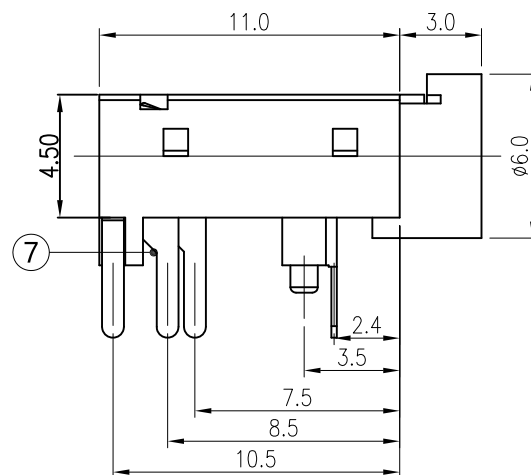


C 1327B 06DX PPA
 B:BLACK
 P:PINK(#199C)
 G:GREEN(#577C)



P.C.B LAYOUT
 TOP VIEW

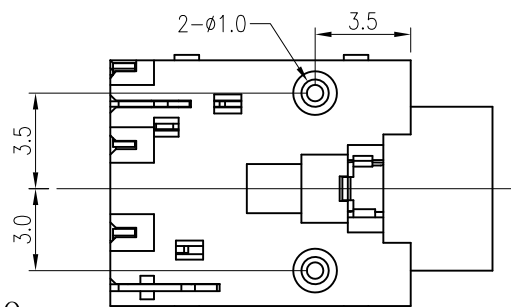

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

8	SHELL	1	SUS 301	
7	HOUSING	1	PA9T	
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
4	CURVE PIECE	1	PHOSPHOR BRONZE	Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE SPECIFIED
 DIMENSION ARE IN CENTIMETER
 TOLERANCE ARE :
 FRACTION DECIMALS ANGLES

.X ± 0.3 .X' $\pm 5'$
 .XX ± 0.2 .X' $\pm 3'$
 .XXX ± 0.1

3rd ANGLE PROJECTION
 SCALE 1:1 UNIT mm SIZE A4

CONSHARE

APPROVALS : DATE
 DRAWN BRAGG 2007/11/01
 CHECKED BRAGG 2007/11/01
 APPROVED JACK 2007/11/01

TITLE
 AUDIO JACK
 PART NO. C 1327B06DXPPA