

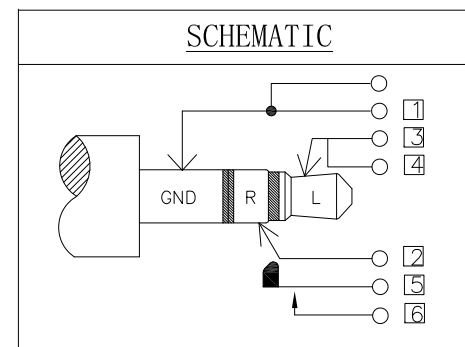
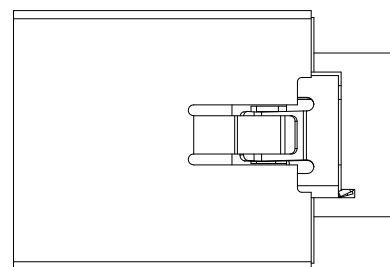
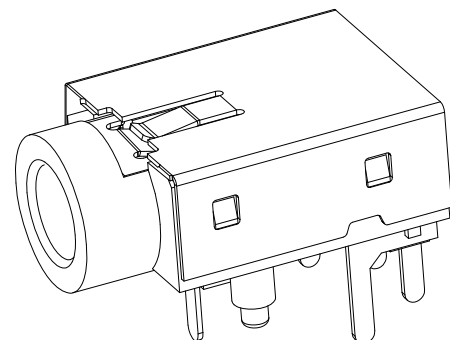
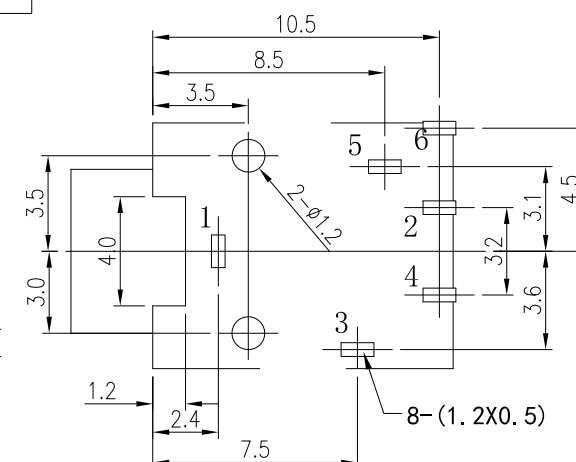
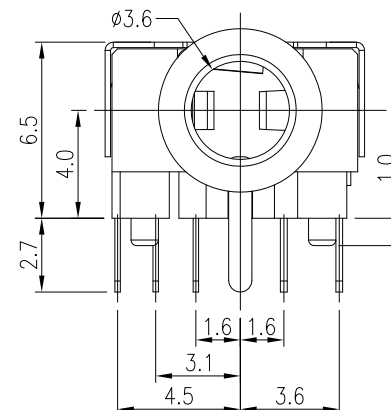


ZONE	SYMBOL	REVISION	APPROVAL	DATE

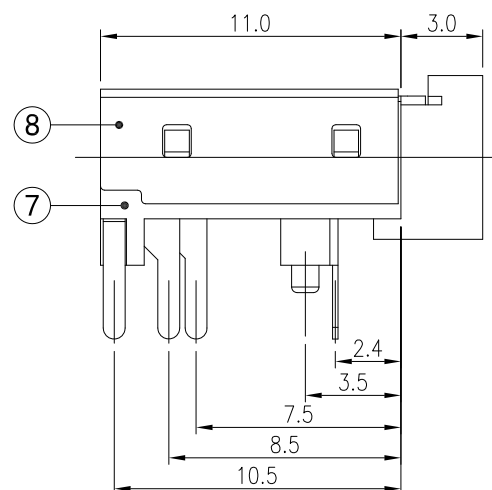


C 1327F 06DX PPA

- B:BLACK
- P:PINK(#199C)
- G:GREEN(#577C)



**P. C. B LAYOUT
TOP VIEW**

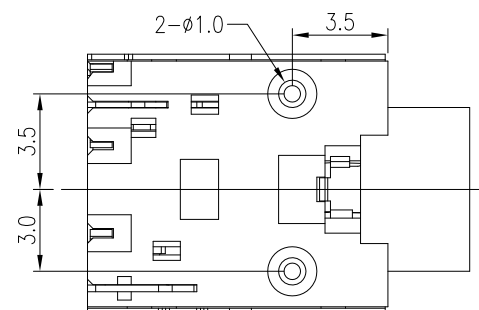


SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

8	SHELL	1	SUS 301	
7	HOUSING	1	PA9T	UL-94V0
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
4	CURVE PIECE	1	PHOSPHOR BRONZE	Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE SPECIFIED
DIMENSION ARE IN CENTIMETERs
TOLERANCE ARE :
FRACTION DECIMALs ANGLES

.X	± 0.3	X"	$\pm 5'$
.XX	± 0.2	.X"	$\pm 3'$
.XXX	± 0.1		



SCALE 1:1 UNIT mm SIZE A4

APPROVALS	DATE	TITLE
DRAWN BRAGG	2007/11/01	AUDIO JACK
CHECKED BRAGG	2007/11/01	PART NO.
APPROVED JACK	2007/11/01	

CONSHARE

AUDIO JACK

C 1327F06DXPPA