

DETAIL A

NOTES:

MATERIAL:


- 1.HOUSING MATERIAL:HIGH TEMPERATURE THERMOPLASTIC GLASS FILLED, UL94V-0,BLACK.
- 2.CONTACT MATERIAL:PHOSPHOR BRONZE T=0.20mm
- 3.GAGE:NICKEL SILVER THICKNESS: 0.25 MM
- 4.PLATING:CONTACT AREA: GOLD OVER 100U" NICKEL.
- 5.DURABILITY: 100 CYCLES MIN.

ELECTRICAL:

- 1.DIFFERENTIAL IMPEDANCE: 100 Ohms.
- 2.CONTACT RESISTANCE: 50 MILLIOHMS MAX.
- 3.INSULATION RESISTANCE: 1000 MEGAOHMS MIN.

TEMPERATURE:

OPERATION: -40°C~ +85°C
STORAGE: -40°C~ +85°C
RoHS COMPLIANT



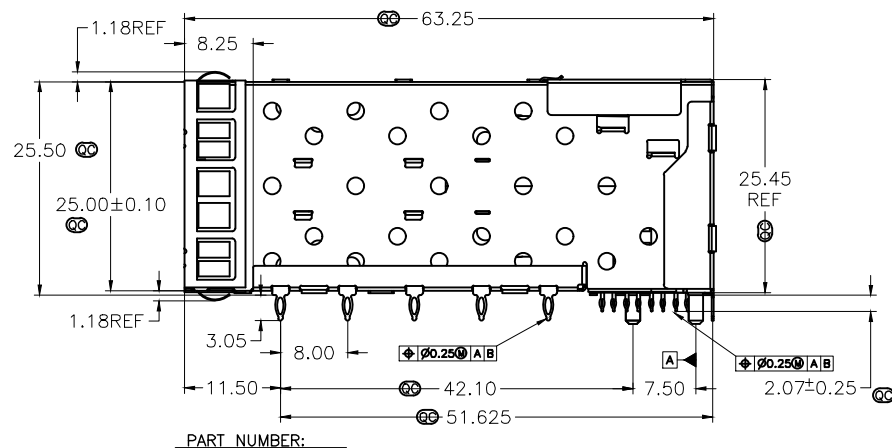


PART NUMBER:

AU004-6A211306




- (SFP / 光模块)
Product Type:
03-SFP 光模块
04-SFP+ 光模块
Shield Type:
0-不镀
1-W/O Shield 2-不镀天窗
3-上镀天窗 4-左镀天窗
5-上、左镀天窗 6-上、下、左镀天窗
Ports:
0-不镀
1-1X1 PORT 4-1X4PORTS
A-2X1 PORT B-2X2PORTS
C-2X4PORTS E-2X6PORTS
Contacts:
1-20pins 2-40pins
3-80pins 4-160pins
5-240pins
PEG/TAB&BACK PEG:(波峰焊后金手指)
1-W/Peg
3-光模块
Gold plating u"
1-Fu" 2-2u" 3-3u" 4-6u"
5-15u" 6-30u" 7-50u"
Logo&PcbType:
0-不镀
1-W/ LOGO
2-W/ &ULLOGO
Plastics Material&Color:
1-PBT+20%GF Black
2-PA46 Black
3-LCP Black
LED LAMP GUIDE Style:
0-W/O LED LAMP GUIDE
1-侧边单光柱
2-中间两个单光柱
3-边上面两个单光柱

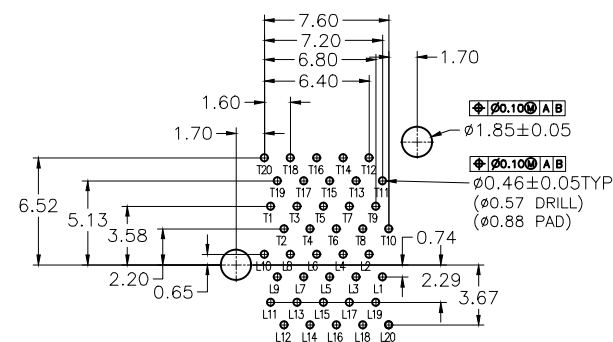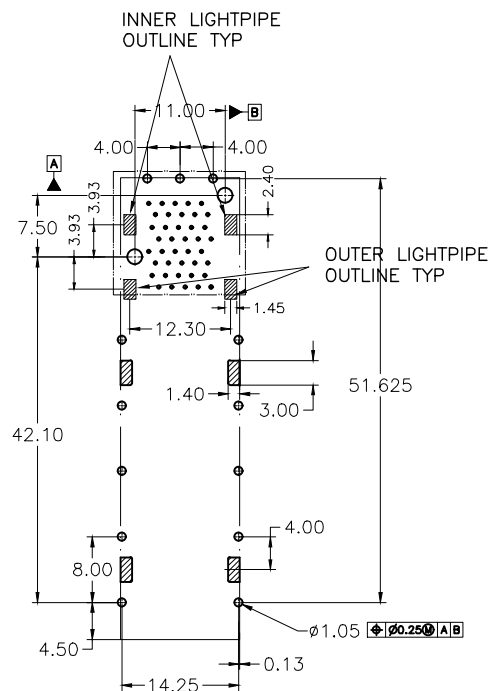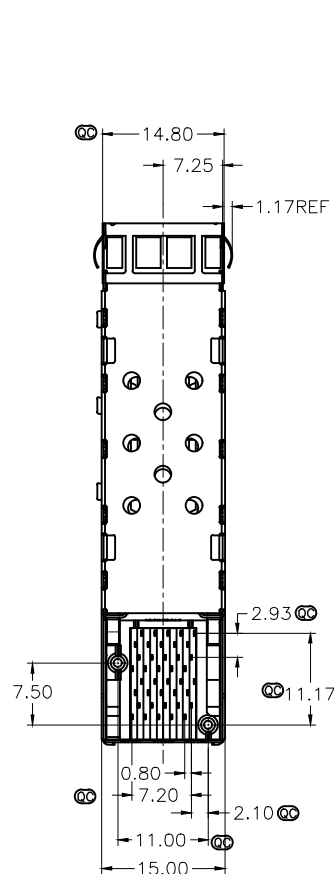
<div> <div>QC</div> <div>CPK</div> </div> <div> <div>Inspection Item</div> <div>CP/Cpk and SPC Control Item</div> </div>	DIMENSION IN mm [Inch]		<div> <div>CONSHARE</div> <div>图号</div> </div>	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		<div> <div>专业号</div> <div>FILE NO.</div> </div>	<div> <div>图号</div> <div>DWG NO. AU0046A211306</div> </div>
	.X± 0.20 X.*± 1°		<div> <div>名称</div> <div>TITLE</div> </div>	
	.XX± 0.15 .X*± 0.5°		<div> <div>名称</div> <div>TITLE</div> </div>	
<div> <div>批准</div> <div>WU</div> </div> <div> <div>检查</div> <div>X.R</div> </div>	.XXX± 0.075		<div> <div>制图</div> <div>liuwei</div> </div>	
	<div> <div>比例</div> <div>SCALE 1:1</div> </div>		<div> <div>图幅</div> <div>SIZE A4</div> </div>	
	<div> <div>页次</div> <div>SHEET 1 / 3</div> </div>		<div> <div>更改</div> <div>REV B</div> </div>	
	<div> <div>名称</div> <div>TITLE</div> </div>		<div> <div>名称</div> <div>TITLE</div> </div>	




RECOMMENDED PCB LAYOUT—COMPONENT SIDE
 RECOMMENDED PCB THICKNESS—2.36 MM(.093 INCH)
 THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT
 TO BE CONSIDERED THE KEEP OUT AREA FOR COMPONENTS
 THIS AREA IS INDICATED BY THE DASHED LINE

更改 REV	更改内容 MODIFICATION	日期 DATE	制图 DRAW	核准 APPROVE
A	图面新发行	2014/08/10	liuwei	OSCAR
B	弹片结构更改	2015/09/22	WSJ	Liuwei

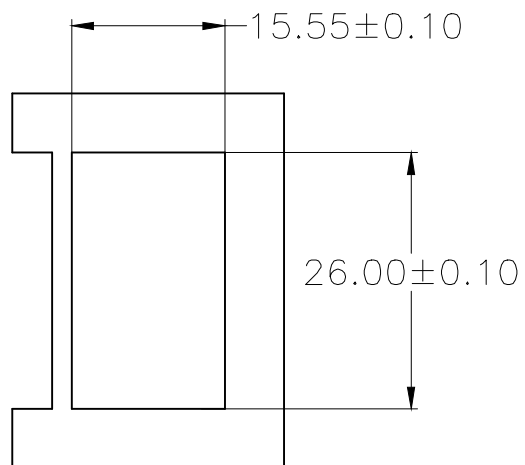

QC :Inspection Item		:Cp/Cpk and SPC Control Item		DIMENSION IN mm [Inch]					
		核准 APPROVE WU X.R		审核 CHECK LW		专案号 FILE NO.		图 号 DWG NO. AU0046A211306	
						名 称 TITLE SFP+ 2X1 带四个导光体			
		制 图 DRAW liuwei		角 度 PROJ.		页 数 SHEET 2 / 3			
				比 例 SCALE 1:1		图 幅 SIZE A4			
				更 改 REV B					

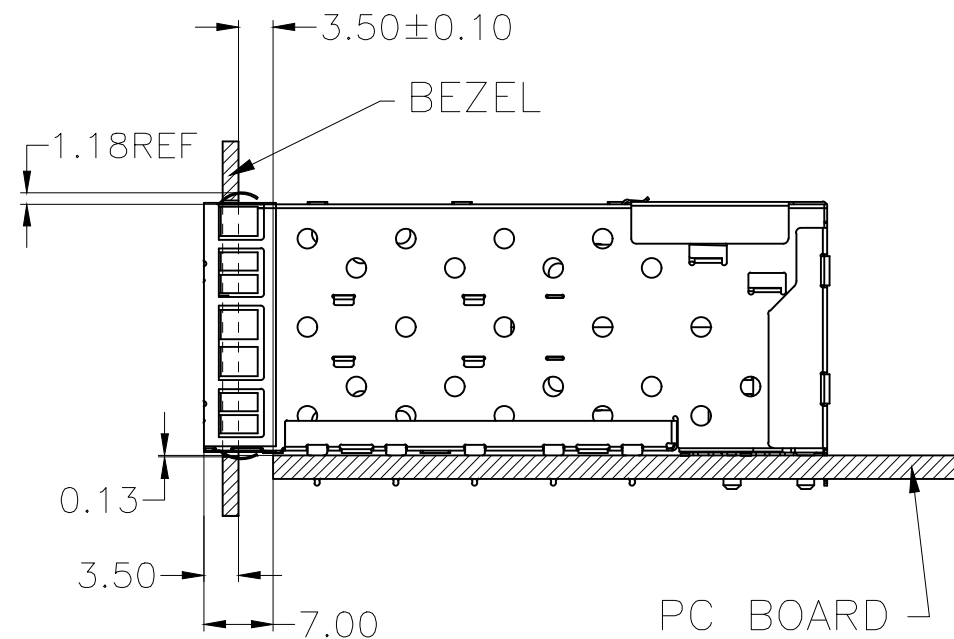

BEZEL CUT-OUT CENTER DETAIL
BEZEL THICKNESS: 0.8–2.6



更改 REV	更改内容 MODIFICATION	日期 DATE	制图 DRAW	核准 APPROVE
A	图画新发行	2014/08/10	liuwei	OSCAR
B	弹片结构更改	2015/09/22	WSJ	Liuwei

QC	:Inspection Item :Cp/Cpk and SPC Control Item	DIMENSION IN mm [Inch]						
		TOLERANCE UNLESS OTHERWISE SPECIFIED		专案号 FILE NO.		图 号 DWG NO. AU0046A211306		
		.X± 0.20	X.*± 1°	名 称 TITLE SFP+ 2X1 带四个导光体				
		.XX± 0.15	.X*± 0.5°					
		.XXX± 0.075						
核准 APPROVE	审核 CHECK	制 图 DRAW	画法 PROJ.		页数 SHEET	3 / 3		
WU X.R	LW	liuwei	比例 SCALE	1:1	图幅 SIZE	A4	更改 REV	B