
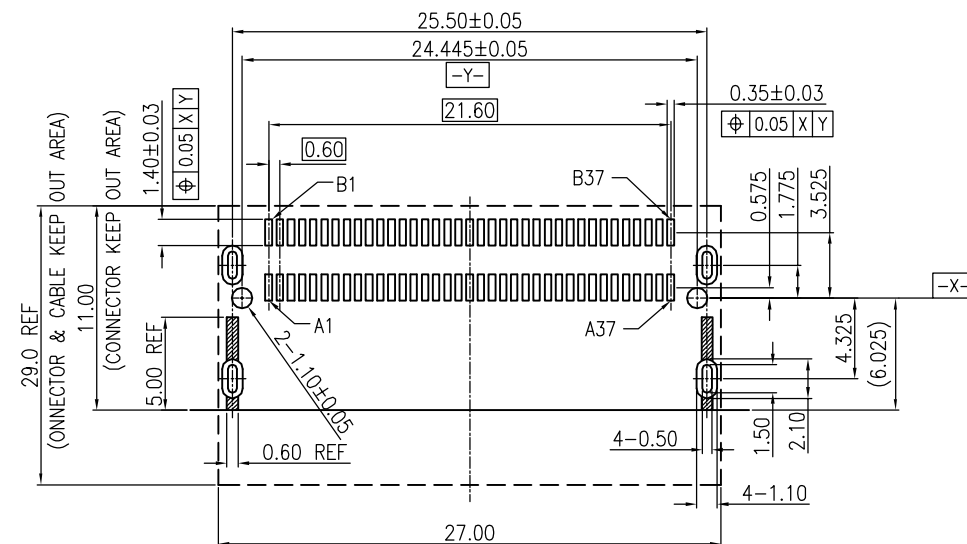
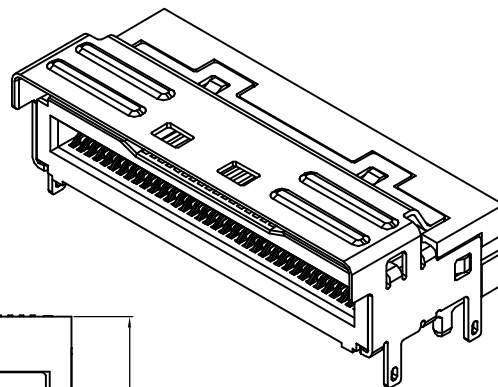




RoHS
Compliant

HF

REV.	ECN.NO.	MODIFY.CONTENT
X1	2022-07-21	NEW

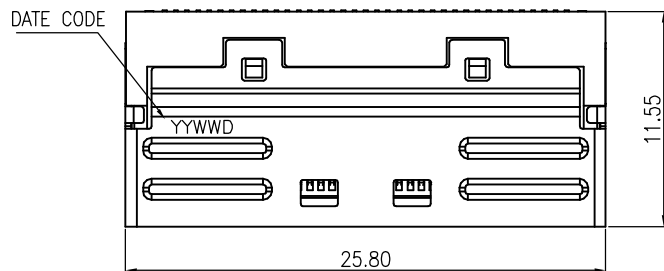

(CONNECTOR & CABLE KEEP OUT AREA)
RECOMMENDED PCB LAYOUT (TOP VIEW) SHELL KEEP OUT AREA
(GENERAL TOLERANCE:±0.05)

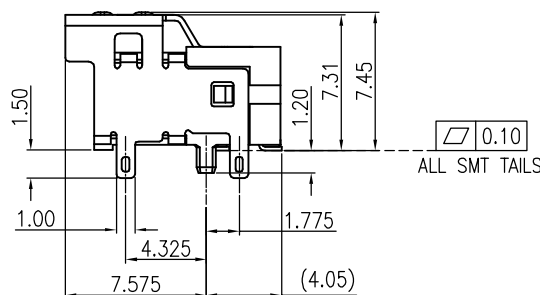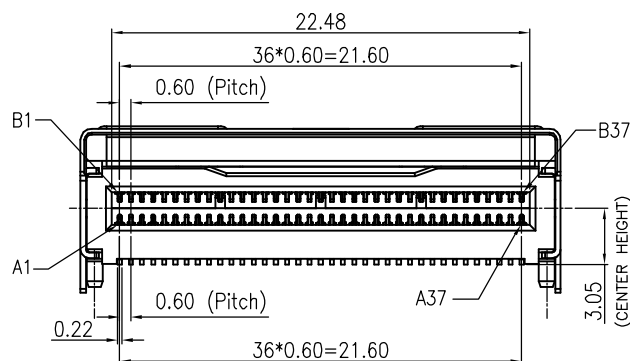

- NOTES:
- MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC 94V-0, BLACK COLOR
TERMINAL: COPPER ALLOY
SHELL: STAINLESS STEEL
 - PLATING:
TERMINAL:
SELECTIVE Au (SEE ORDER INFORMATION) ON CONTACT AREA,
MATTE TIN ON SOLDER TAIL 80u"AREA, BOTH OVER Ni 50u" UNDERPLATED.
SHELL:
SOLDERABLE Ni 50u" PLATED OVERALL.
 - PACKING: TAPE & REEL
 - ORDER INFORMATION: CUC21FW7400XX

- 42: Au 1u"
-43: Au 3u"
-46: Au 15u"
-47: Au 30u"

GENERAL	TOLERANCE	DWG.NO.	MC21-FW74-0000	PART.NO.	CUC21FW7400XX	DRAWN	Tony 2022-07-21	UNIT	mm	SCALE	1:1
x,±0.50	x.± 5°	REV.	1	TITLE	MINI COOL EDGE IO INTEGRATED 74P CONNECTOR 0.60PITCH (PCIE GEN 5)	CHECKED					
.x±0.25	.x.± 2°	SIZE		SHEET	1 OF 2	APPROVED					
.xx±0.15	.xx± 1°	A4									

互连精密技术（深圳）有限公司


包裝作業規範

REV.	ECN.NO.	MODIFY.CONTENT
X1	2022-07-21	NEW


包裝作業圖示及說明

(PACKING OPERATION DIAGRAM & INSTRUCTION)



- 一. 1) 將成品一一放入REEL包裝盤內,依同一方向放入
2) 包裝時,如圖所示。
3) 一個REEL包裝盤放置300個成品。

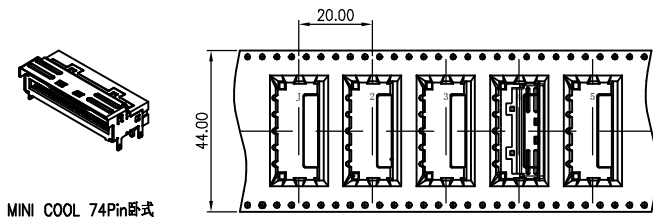

- 三. 1) 每箱裝 6 盤REEL包裝盤。
2) 每箱放置1800 PCS 的成品。

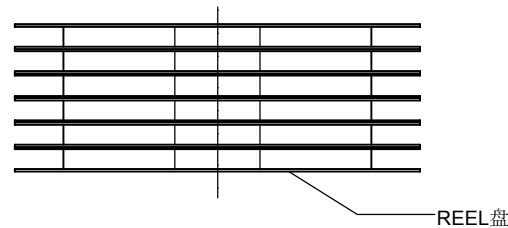

- 二. 1) 裝盤前先把前面空15pcs產品,然後再開始裝盤,
尾端也需空15pcs產品,上帶加長200mm。
2) 裝滿成品的REEL包裝盤如下圖所示。

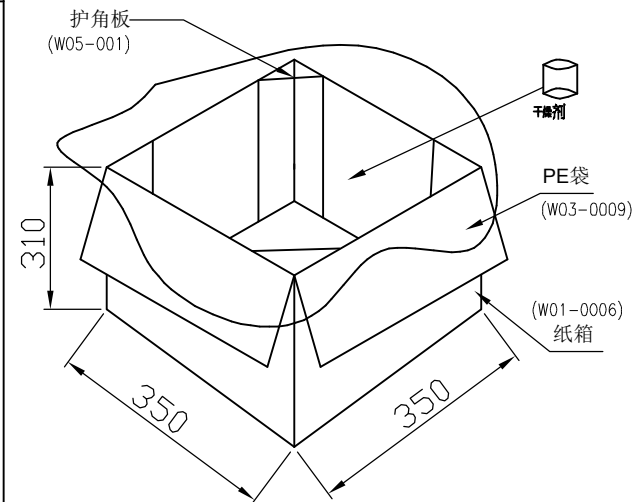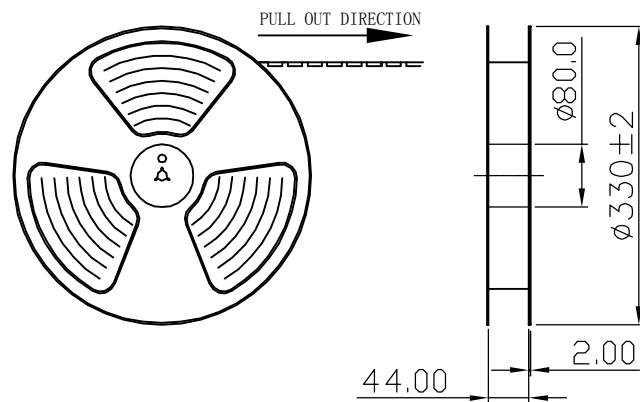

- 四. 1) 用TAPE將紙箱封實。

備 註 (REMARK)

1. 若有未裝滿之零數箱,必須以緩衝材塞滿。

GENERAL	TOLERANCE	DWG.NO.	MC21-FW74-0000	PART.NO.	CUC 21FW7400XX	DRAWN	Tony 2022-07-21	UNIT	mm	SCALE	ND SCALE
x,±0.50	x.± 5°	REV.	1	TITLE	MINI COOL EDGE IO INTEGRATED 74P CONNECTOR 0.60PITCH (PCIE GEN 5)	CHECKED					
.x±0.25	.x'± 2°	SIZE		SHEET	2 OF 2	APPROVED					
.xx±0.15	.xx± 1°	A4									