



SECTION B-B

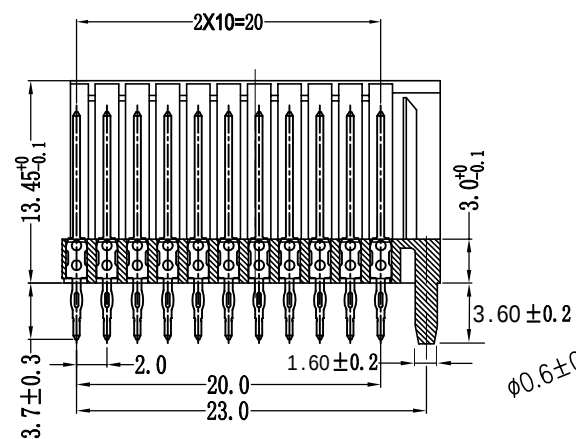

SECTION A-A

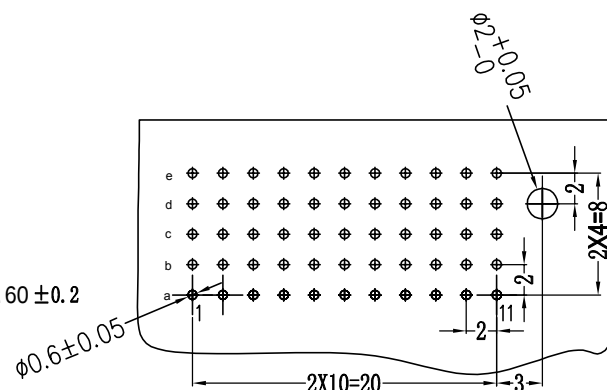

固定PCB板尺寸 (公差 ± 0.05)

▲表面处理

1. 插针: 铜合金, 底层镀镍, 接触区表面镀金, 压接处镀锡;
2. 塑件材料: 耐高温工程材, 阻燃UL94V-0

▲电气性能

1. 接触电阻 $\leq 20\text{m}\Omega$ (max)
2. 额定电流: 1.5A at 20°C , 1.0A at 70°C
3. 额定电压: 500V AC
4. 绝缘电阻: $10^4\text{M}\Omega$ (min)
5. 耐电压: 750VAC

▲工作温度及湿度: -55°C — 125°C /5—85%R. H

* 重点尺寸	名称:2mm-II-C型 55芯前端	视角: 	比例:1:1	版次:A1
() 参考尺寸	型号:HMMC55011012B	单位: mm	缩水:	页次:1/1
未注尺寸公差 GB1804-m	图号:	物料编码:BFMC55011012B		
0-6 ±0.10	批准:			
6-30 ±0.20	审核:			
30-120 ±0.3	设计:			
佳 角度公差 ±2°				

