
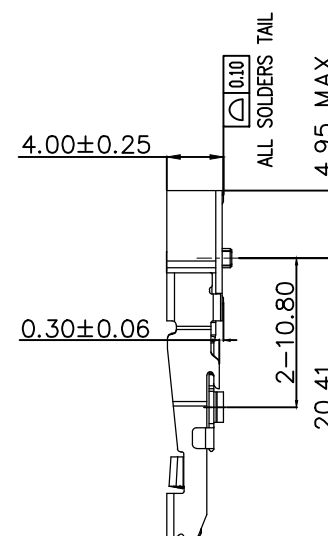
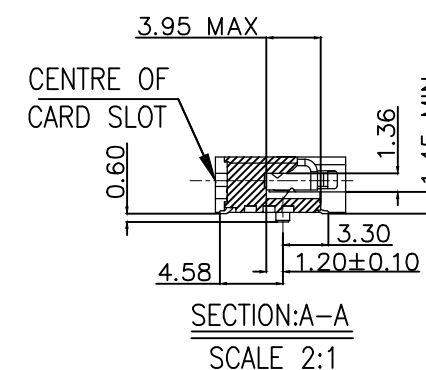


[illegible]

CURF2 62T014**

13: 功能区镀金30U",锡脚镀G/H




G	FIXED-B	1	SUS304 3/4H 0.35T	Matt Tin plating All Over 120u"Min
F	FIXED-A	1	SUS304 3/4H 0.35T	
E	LATCH-B	1	SUS301 1/2H 0.35T	Clear
D	LATCH-A	1	SUS301 1/2H 0.35T	
C	TERMINAL-B	131	C5210-EH 0.15T	Contact area gold plating Solder TAIL G/F Ni 50u"Min Underplate
B	TERMINAL-A	131	C5210-EH 0.15T	
A	HOUSING	1	LCP E480i,UL94V-0	BLACK.
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

GENERAL TOLERANCE		DWG.NO.	PART.NO.	CURF262T014XX	DRAWN	Qiang 2022-02-18	UNIT	mm	SCALE	NO SCALE
x.±0.50	x.°± 5°	REV.	X1							
.x±0.25	.x°± 2°	SIZE		DDR5 SO DIMM 262Pin(RVS) H4.0	CHECKED					
.xx±0.15	.xx°± 1°	A4		1 OF 4	APPROVED					





REV.	ECN.NO.	MODIFY.CONTENT
X1		

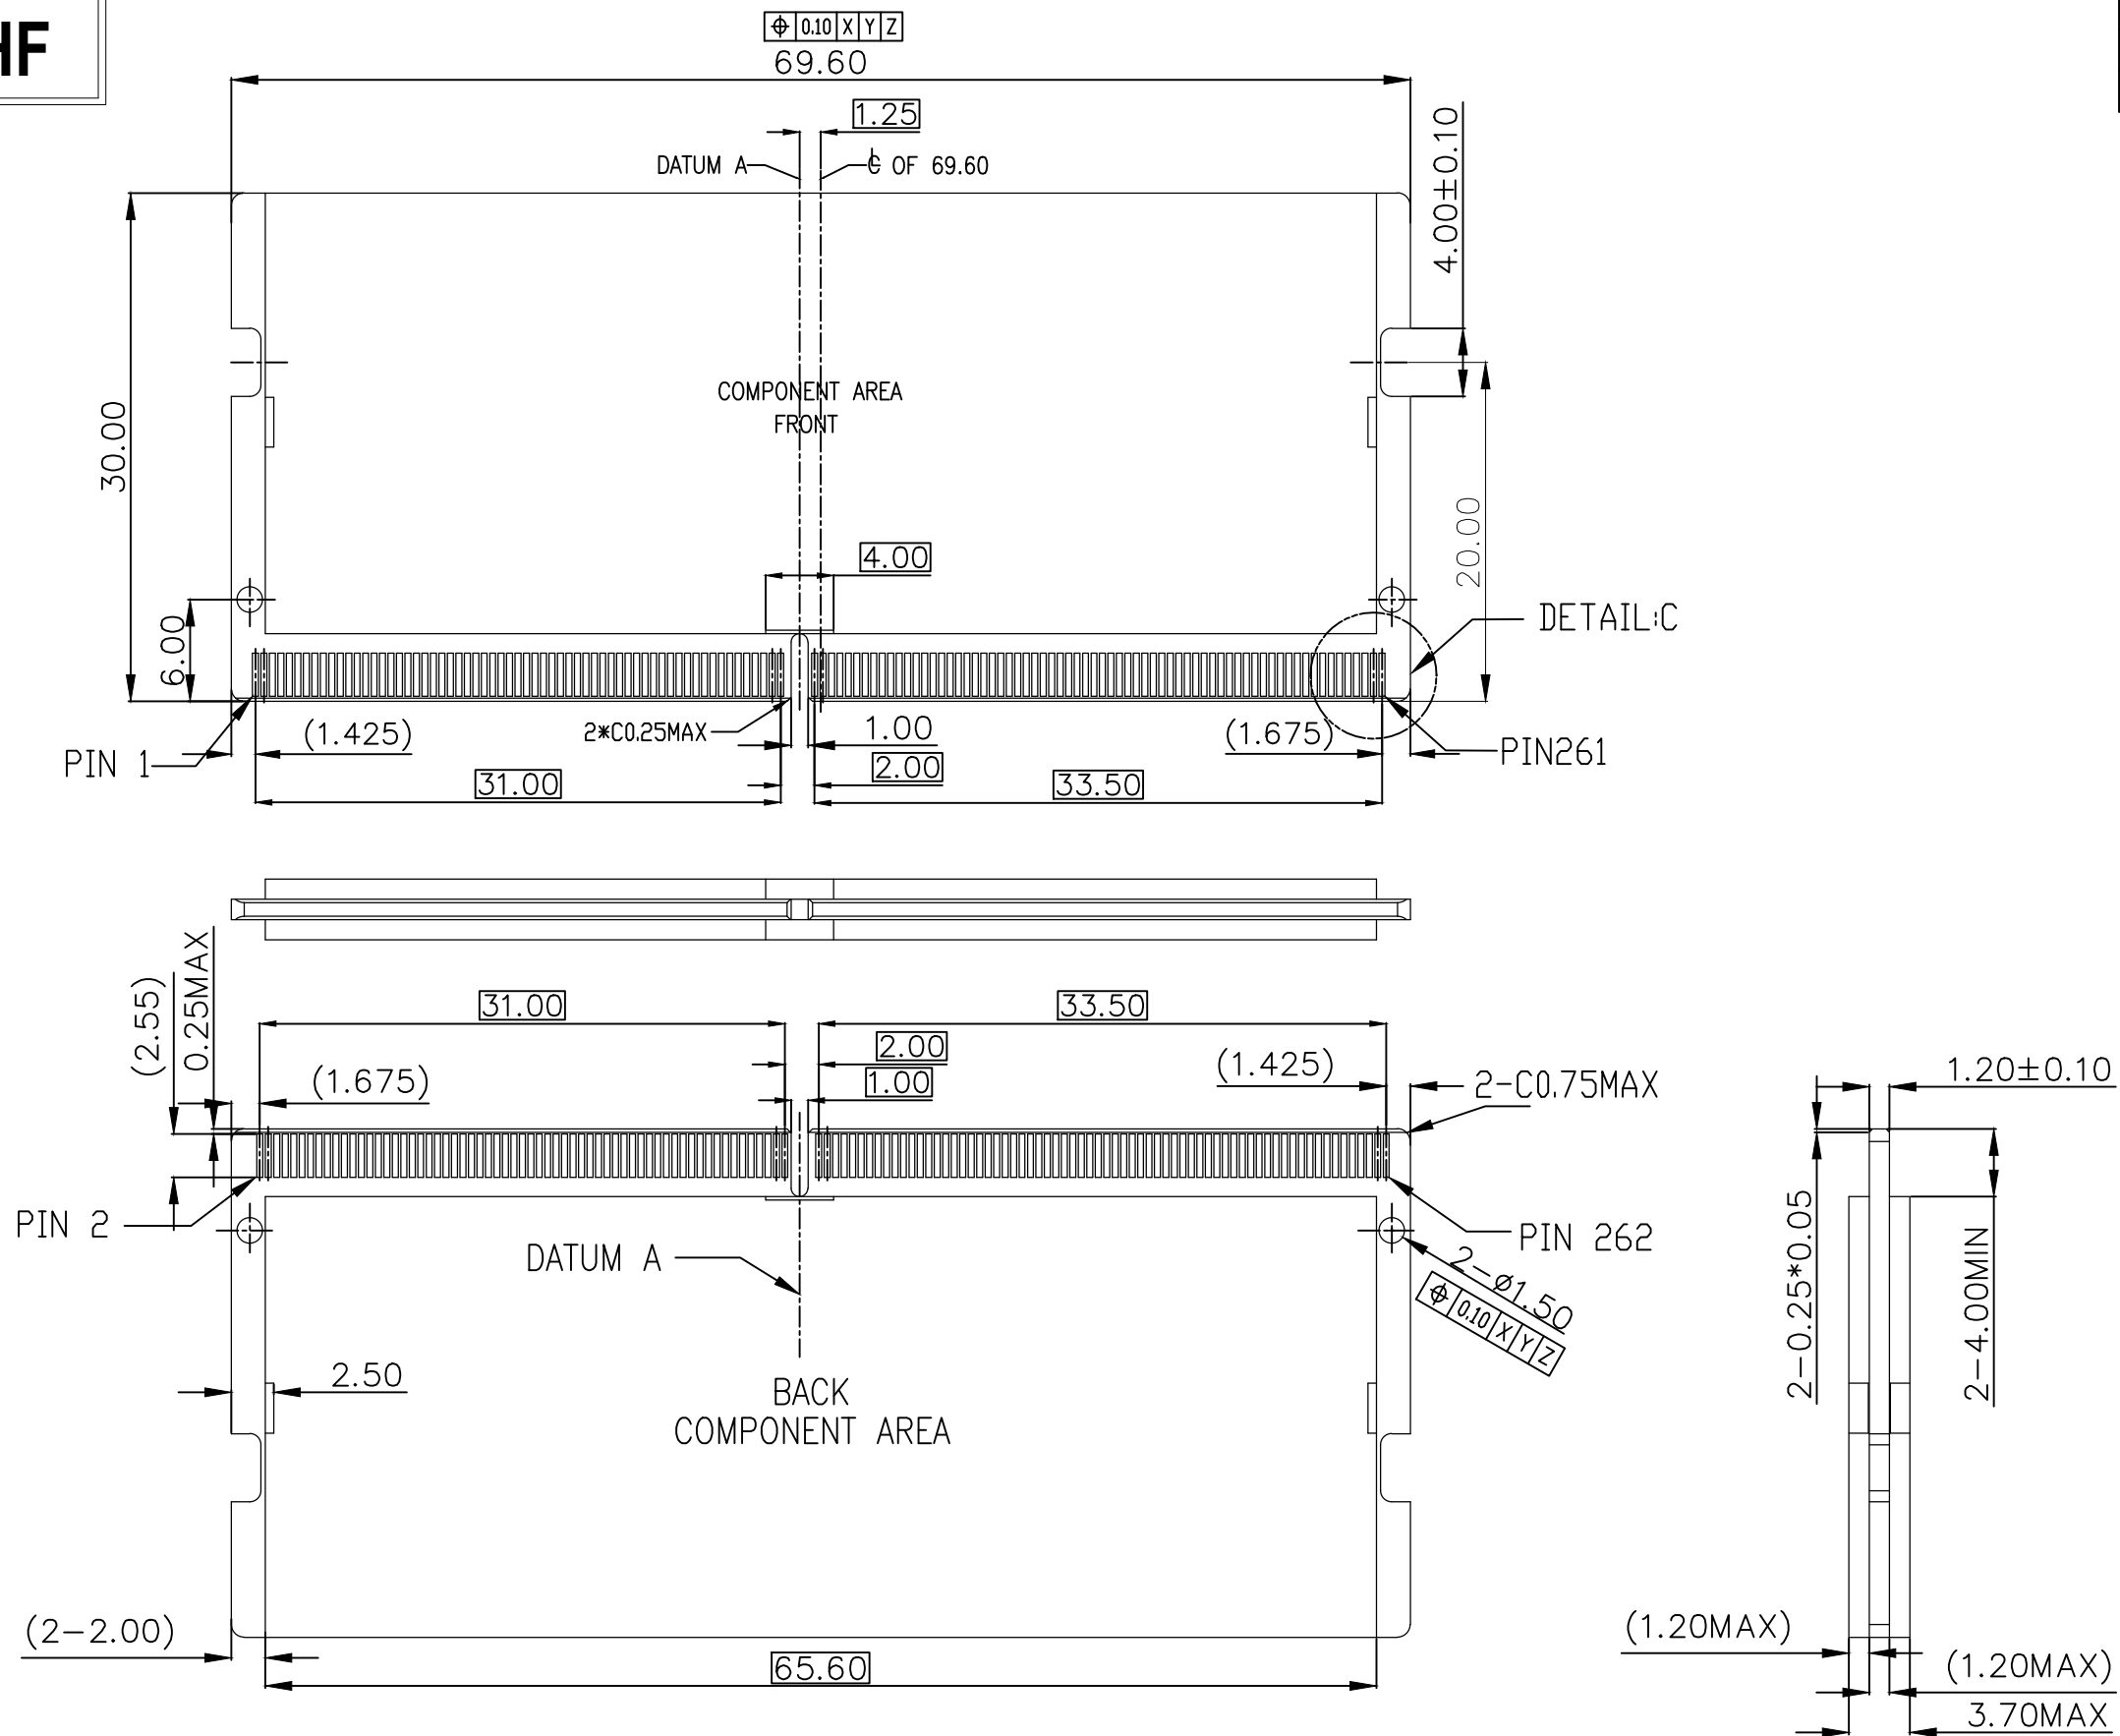

GENERAL TOLERANCE		DWG.NO.		PART.NO.	C URF262T014XX	DRAWN	Qiang 2022-02-18	UNIT	mm	SCALE	NO SCALE
x,±0.50	x.°± 5°	REV.	X1	TITLE	DDR5 S0 DIMM 262Pin(RVS) H4.0	CHECKED					
.x±0.25	.x°± 2°	SIZE		SHEET	2 OF 4	APPROVED					
.xx±0.15	.xx°± 1°	A4									





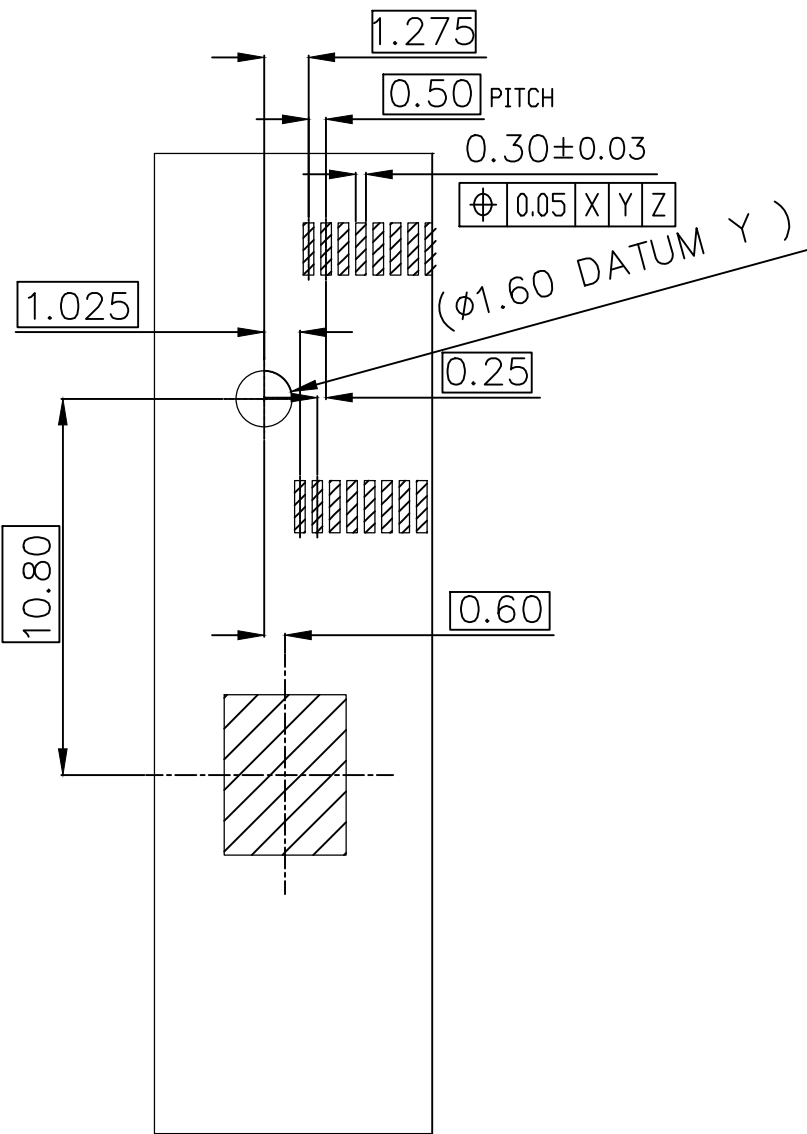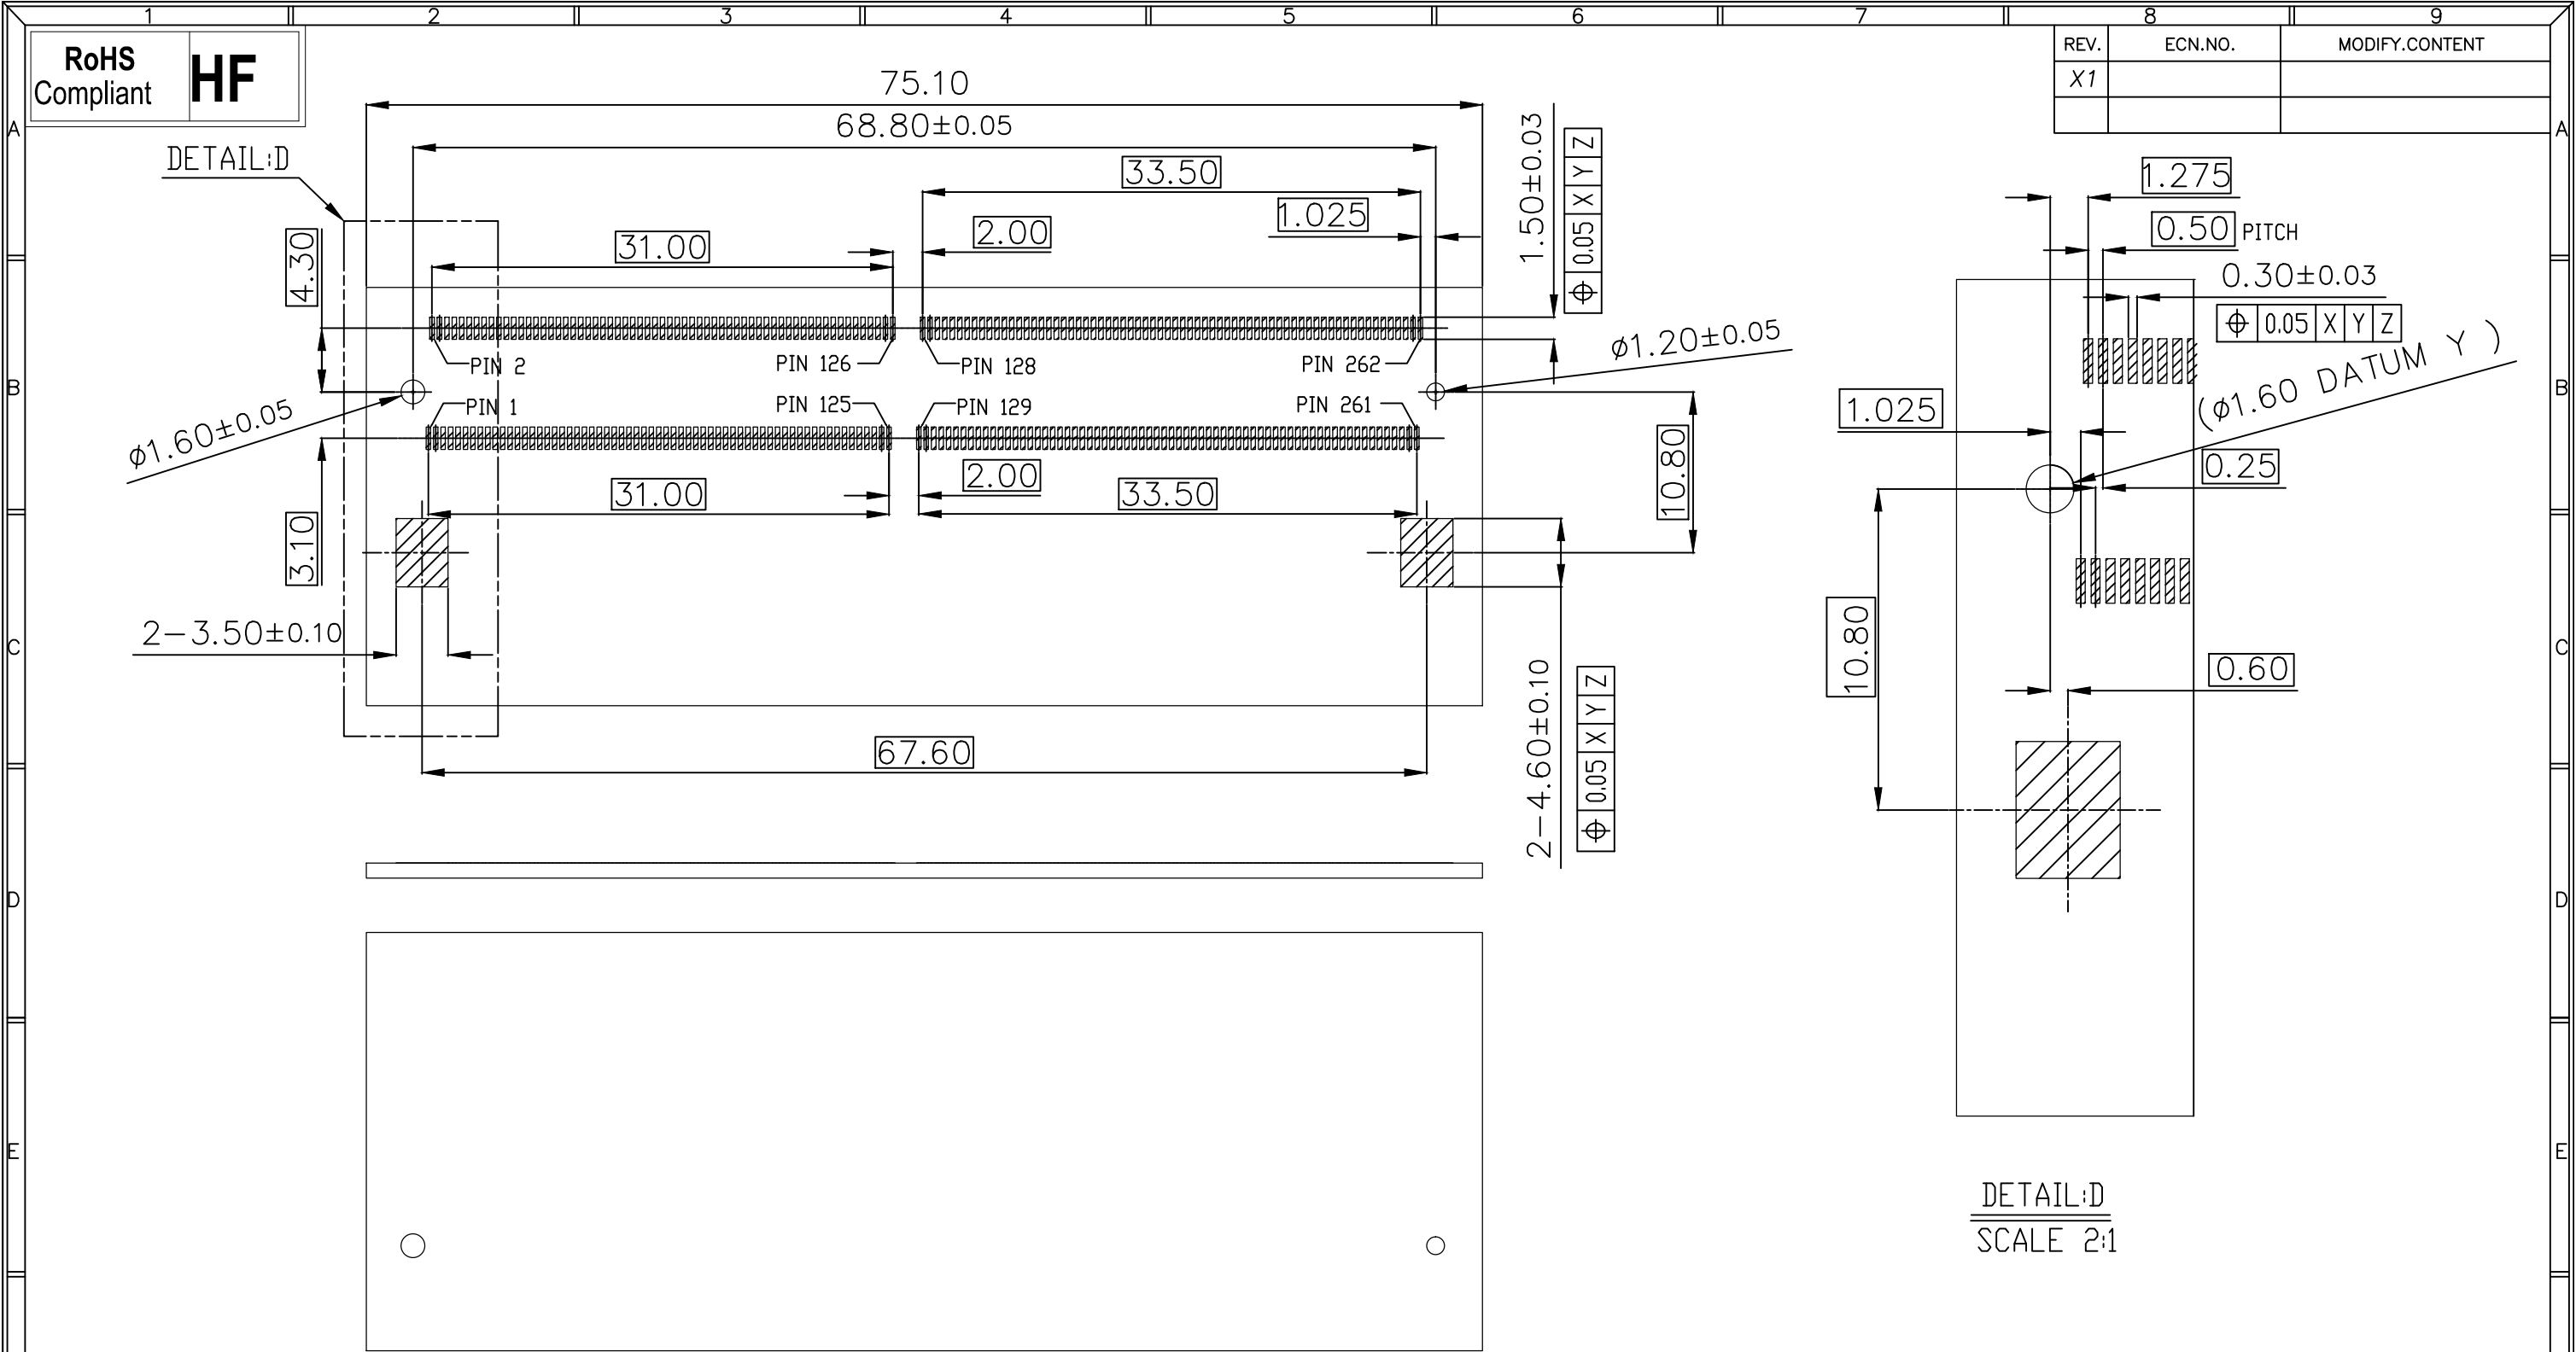



THE TOLERANCE UNLESS SPECIFIED IS±0.05 MM

Solder pad area

GENERAL TOLERANCE		DWG.NO.	PART.NO.		DRAWN	UNIT	SCALE		NO SCALE
x,±0.50	x.°± 5°	REV.	X1	TITLE	CHECKED				
.x±0.25	.x°± 2°	SIZE		SHEET	APPROVED				
.xx±0.15	.xx°± 1°	A4							

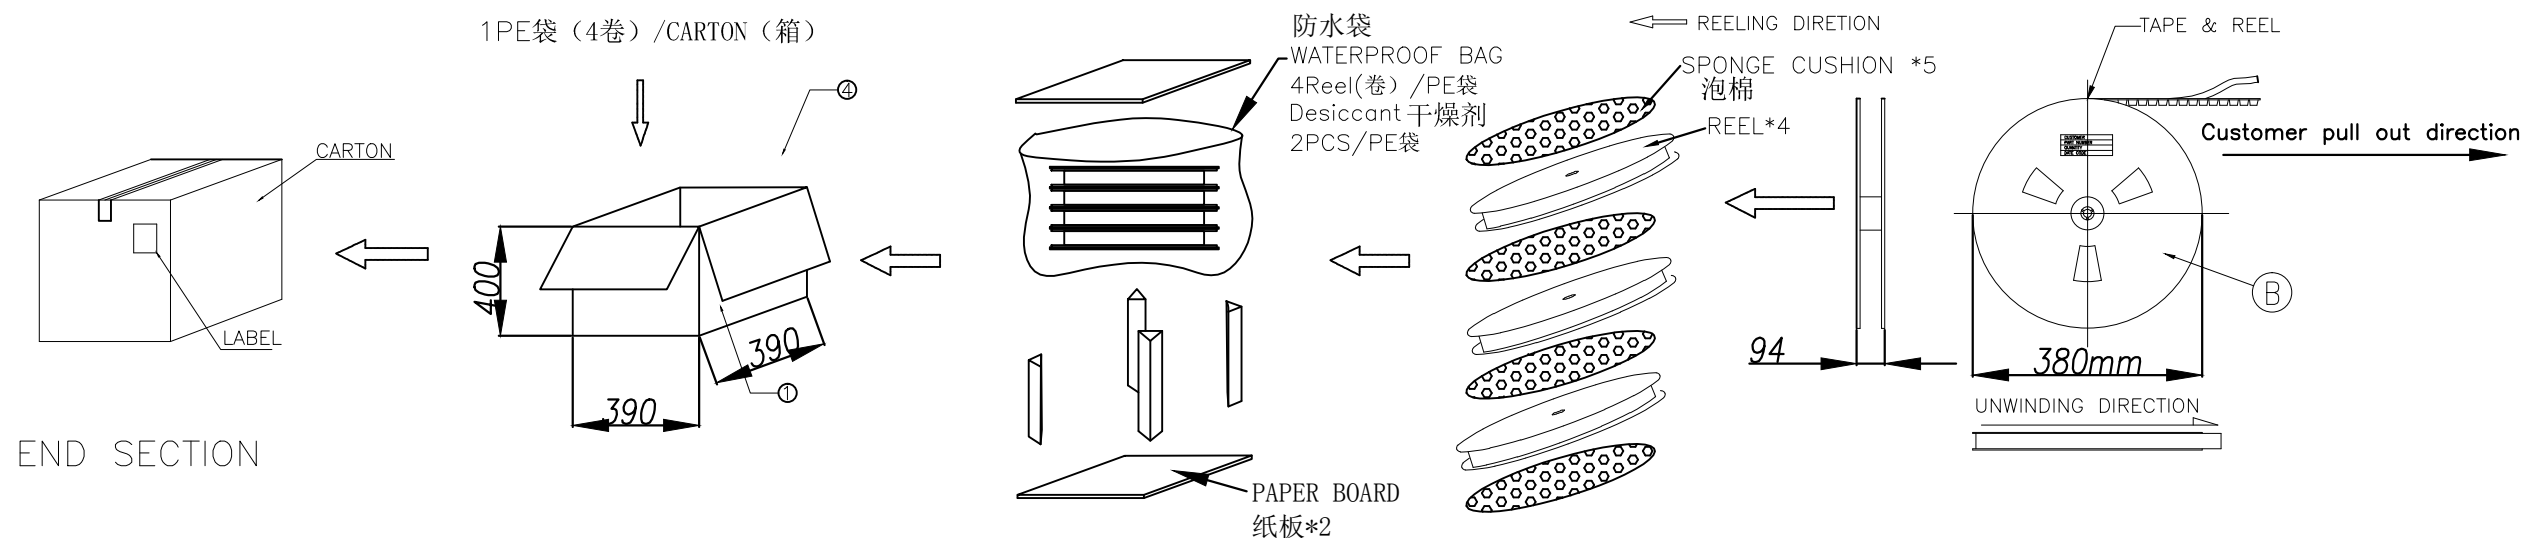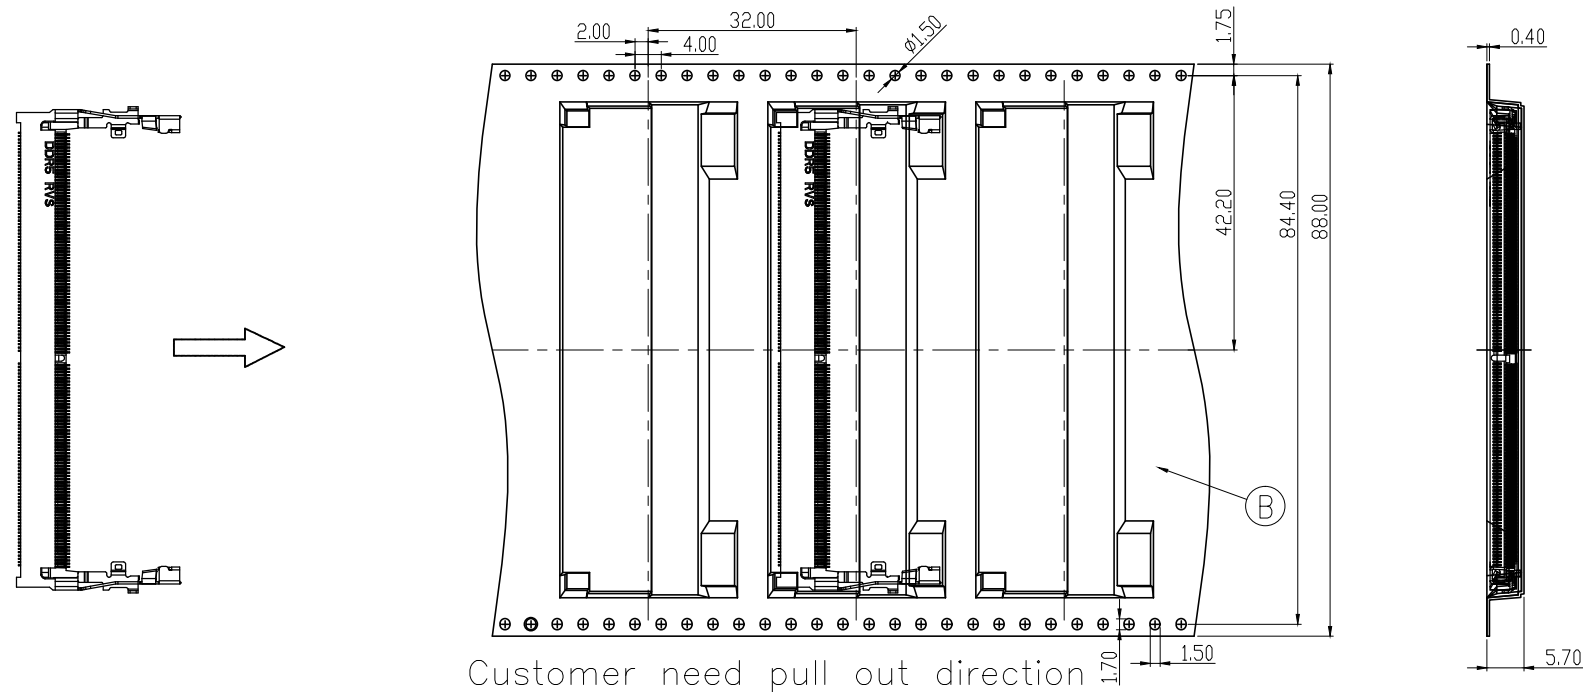

END SECTION

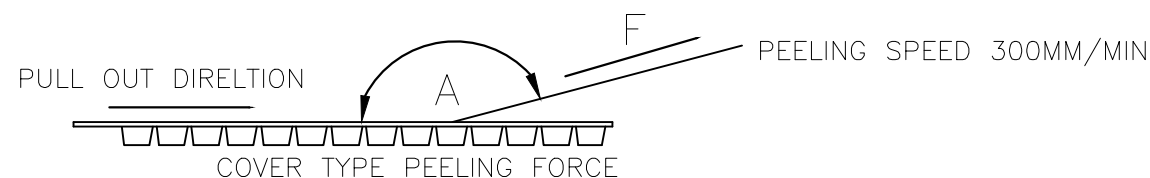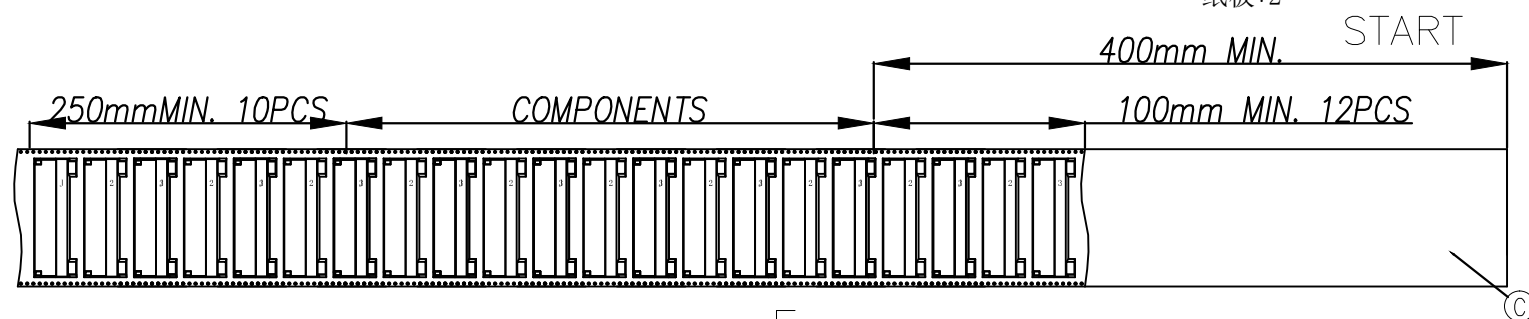

A	165°-180°
F	0.1N-1.3N

NOTES:

1.Quantity:

500PCS/Reel

4 Reel/Carton: 2000 PCS/Carton

2.Each plate needs vacuum packaging, and 2PCS desiccant is placed in the packaging bag

⑤	WATERPROOF BAG	1	
④	SUPPORT BRACE	4	
③	REEL ASS'Y	4	
②	CARRIER TAPE	4	
①	CARTON	1	
ITEM	MATERIAL	Q'TY	NOTE

GENERAL	TOLERANCE	DWG.NO.	PART.NO.	CURF262T014XX	DRAWN	Qiang 2022-02-18	UNIT	mm	SCALE	NO SCALE
x,±0.50	x.°± 5°	REV.	X1	TITLE	DDR5 S0 DIMM 262Pin(RVS) H4.0	CHECKED				
.x±0.25	.x°± 2°	SIZE		SHEET	4 □F 4	APPROVED				
.xx±0.15	.xx°± 1°	A4								

