

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP WHITE ,UL94V-0.
- 1.2 CONTACT: COPPER ALLOY,GOLD (SEE P/N) PLATED IN CONTACT AREA,GOLD FLASH PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.
- 1.3 CAP: SUS304 3/4H.

2. ELECTRICAL:

- 2.1 CURRENT RATING:0.5A;
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MINUTE.
- 2.3 CONTACT RESISTANCE: 50mΩ MAX.
- 2.4 INSULATION RESISTANCE: 500V DC/0.1S/1000MΩ
- 2.5 OPERATION TEMPERATURE:-40°C TO +105°C.

3.ORDER INFORMATION:

AA025 M XXX XX XXX R

Pin数
SEE TABLE

端子电镀:

G0=Gold Flash
G1=1u" Gold
G2=3u" Gold
G3=5u" Gold
G4=10u" Gold
G5=15u" Gold
G6=30u" Gold

塑胶高度: H





046=4.60mm
056=5.60mm
066=6.60mm
076=7.60mm

包装方式:




T=TUBE
P=TUBE+CAP
R=TAPE REEL
E=PE袋

TABLE.


PIN No.	A	B	C	D
010=2*05PIN	9.80	3.20	4.80	8.20
020=2*10PIN	13.80	7.20	8.80	12.20
030=2*15PIN	17.80	11.20	12.80	16.20
040=2*20PIN	21.80	15.20	16.80	20.20
050=2*25PIN	25.80	19.20	20.80	24.20
060=2*30PIN	29.80	23.20	24.80	28.20
070=2*35PIN	33.80	27.20	28.80	32.20
080=2*40PIN	37.80	31.20	32.80	36.20
100=2*50PIN	45.80	39.20	40.80	44.20
120=2*60PIN	53.80	47.20	48.80	52.20
140=2*70PIN	61.80	55.20	56.80	60.20
150=2*75PIN	65.80	59.20	60.80	64.20
160=2*80PIN	69.80	63.20	64.80	68.20
180=2*90PIN	77.80	71.20	72.80	76.20
200=2*100PIN	85.80	79.20	80.80	84.20

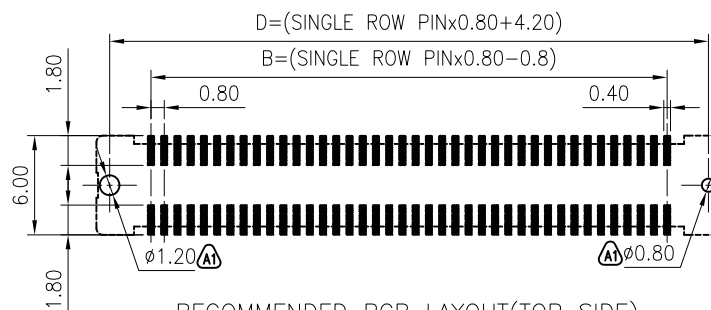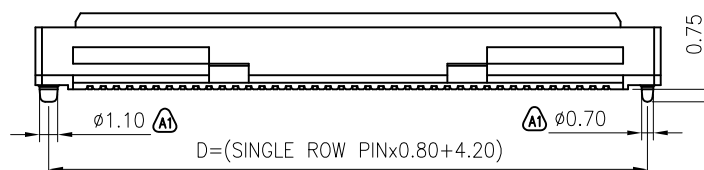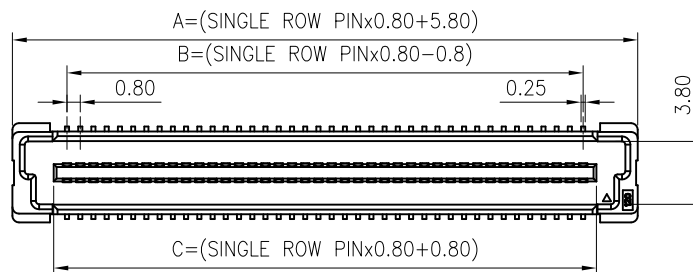

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLERANCE±0.05

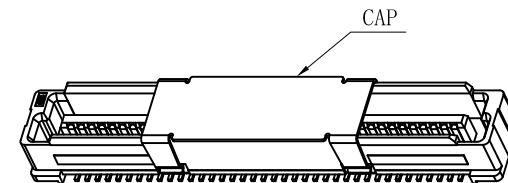

产品合高5.0~8.0mm



					OPERATION	DRAW	WLY	2021.11.12				
					X.X ±0.40	DESIGN	Jensen	2021.11.12				
					X.XX ±0.25	CHECK	Jack	2021.11.12				
A1	2021.11.12	柱子由1.20和0.80修改为1.10和0.70		WLY	X.XXX ±0.15	APPROVE	Andy	2021.11.12	SIZE	A4	PART NO.	AA025MXXXXXXXXXX
AO		NEW			Angle ±3°				SHEET	1/1	TITLE:	0.80mm BTB 公头直立式SMT
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM. TOL	UNIT	mm	SCALE	1:1	PROJ.	DRAW NO.	074