

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP BLACK,UL94V-0.
- 1.2 CONTACT: PHOSPHOR BRONZE ,GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA,50u" MIN. NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING:3A;
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MINUTE.
- 2.3 CONTACT RESISTANCE: 30mΩ MAX.
- 2.4 INSULATION RESISTANCE: 1000MΩ MIN.
- 2.5 OPERATION TEMPERATURE:-40°C TO +105°C.






3.ORDER INFORMATION:

AA XXX XX 078 C 02


Pin 数码	端子电镀:	塑胶高度:	包装方式:
010=2x5PIN	S1=1u" Gold/Tin	078=7.8mm	C=TRAY
.....	S2=3u" Gold/Tin		
200=2x100PIN	S3=5u" Gold/Tin		
	S4=10u" Gold/Tin		
	S5=15u" Gold/Tin		
	S6=30u" Gold/Tin		

TABLE1:


No. OF PIN	A	B	C	D	D
010:2x5PIN	3.20	5.40	8.60	6.20	5.10
020:2x10PIN	7.20	9.40	12.60	10.20	9.10
030:2x15PIN	11.20	13.40	16.60	14.20	13.10
040:2x20PIN	15.20	17.40	20.60	18.20	17.10
050:2x25PIN	19.20	21.40	24.60	22.20	21.10
060:2x30PIN	23.20	25.40	28.60	26.20	25.10
080:2x40PIN	31.20	33.40	36.60	34.20	33.10
100:2x50PIN	39.20	41.40	44.60	42.20	41.10
120:2x60PIN	47.20	49.40	52.60	50.20	49.10
140:2x70PIN	55.20	57.40	60.60	58.20	57.10
150:2x75PIN	59.20	61.40	64.60	62.20	61.10
200:2x100PIN	79.20	81.40	84.60	82.20	81.10

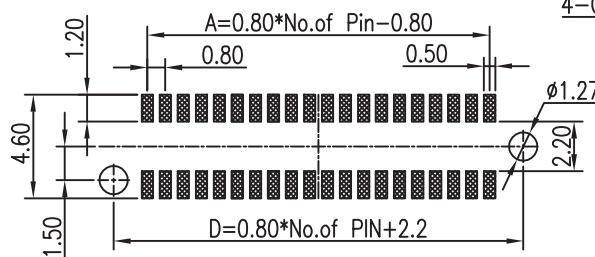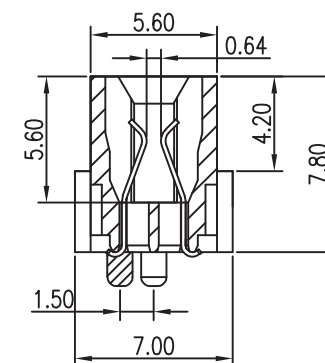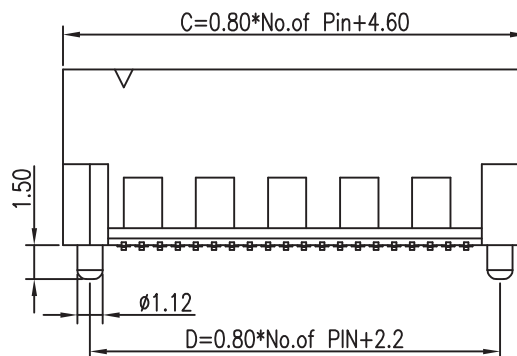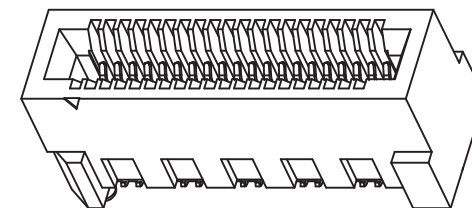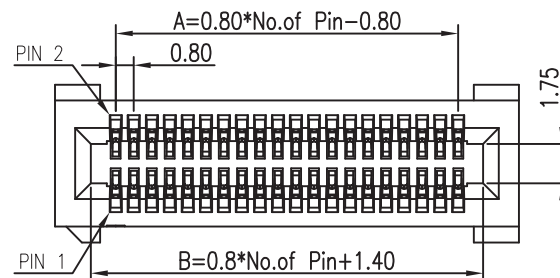

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCE±0.05

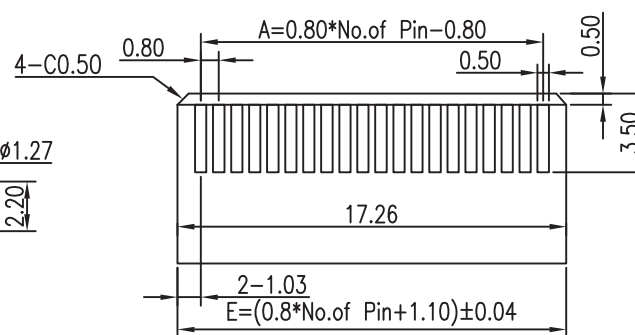

ROMMENDED PLUG-PCB LAYOUT
TOLERANCE ±0.05



GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	CONSHARE
X ± 0.40	X* ± 3°	AAXXXXXX078C02	
XX ± 0.25	X* ± 2°	APPROVED BY	TITLE
XXX ± 0.15	XX* ± 1°	JACK	
CUSTOMER DRAWING		CHECKED BY	DWG NO.
		MIKE	
SIZE	UNITS	DRAWN BY	SHEET
A4	MM[INCH]	CC	
		SCALE	REV
		1:1	1