

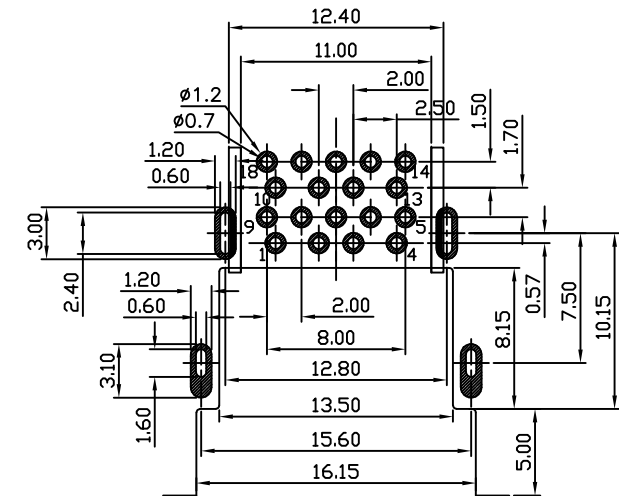
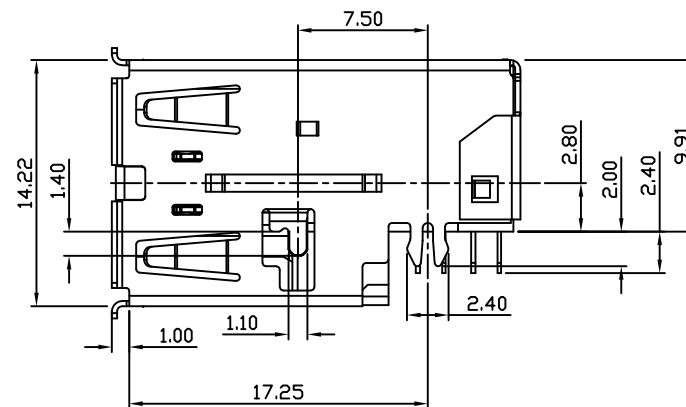


RECOMMEND PANEL CUTOUT

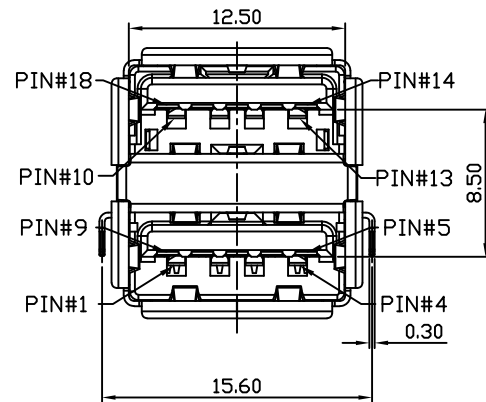

RECOMMENDED P.C.B LAYOUT
TOLERANCE: ± 0.05 (TOP VIEWS)

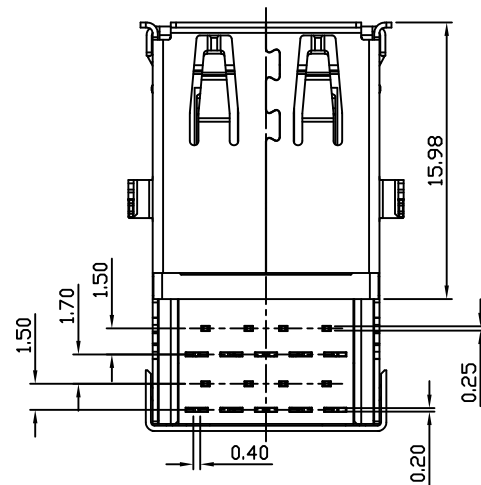

NOTES:

1. MATERIAL:

1.1 HOUSING & COVER: HIGH TEMPERATURE THERMOPLASTIC , GLASS FIBER FILLED, UL94V-0, COLOR : BLUE.

1.2 CONTACTS 5PIN: BRASS,

1.3 CONTACTS 4PIN: PHOSPHOR BRONZE,

1.4 SHELL: SUS201.

1.5 ISOLATED: SK7.

2. FINISH:


2.1 CONTACTS: 30u" MIN GOLD PLATED ON CONTACT AREA, 100u" MIN. MATTE-TIN PLATED ON SOLDER TAIL, 50u" MIN. NICKEL UNDERPLATED OVERALL.

2.2 SHELL: [50u" MIN. NICKEL PLATED OVERALL.




2.3 ISOLATED: 50u" MIN. NICKEL PLATED OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C



BZ06C07114111	T&R
BZ06C07114101	TRAY
PART NUMBER	PACKING

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.30 2 PLC ±0.20 3 PLC ±0.15 ANGLES ±3°	DWN	bin						
	CHK	03-DEC-2020						
MATERIAL	APVD	NAME					USB 3.0 A TYPE DIP 双层沉板式(一体式铁壳)	
	PRODUCT SPEC							
SEE NOTE								
FINISH	QUALIFICATION TEST REPORT	LOC	SIZE	DRAWING NO	REV			
	SEE NOTE	DW	A4	C071141	A0			
	WEIGHT	SCALE		SHEET				
		--						



A0	FIRST RELEASED	--	bin	03 DEC 2020
LTR	REVISION RECORD	ECN	DWN	DATE

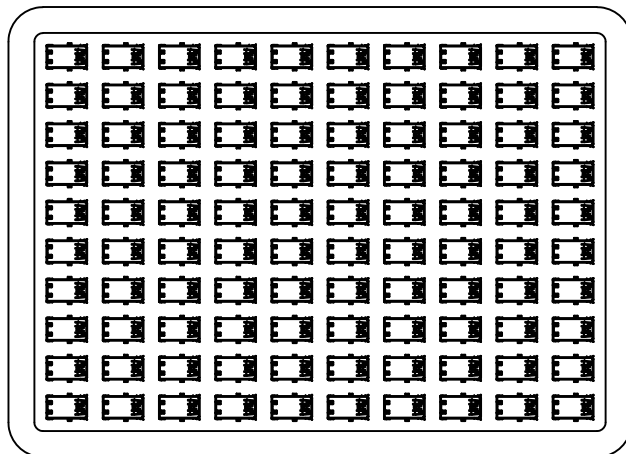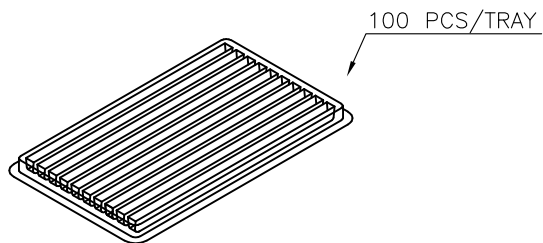

COVER TRAY



10 LAYERS

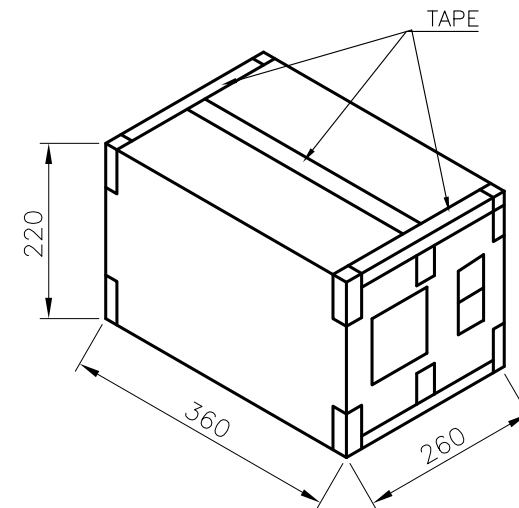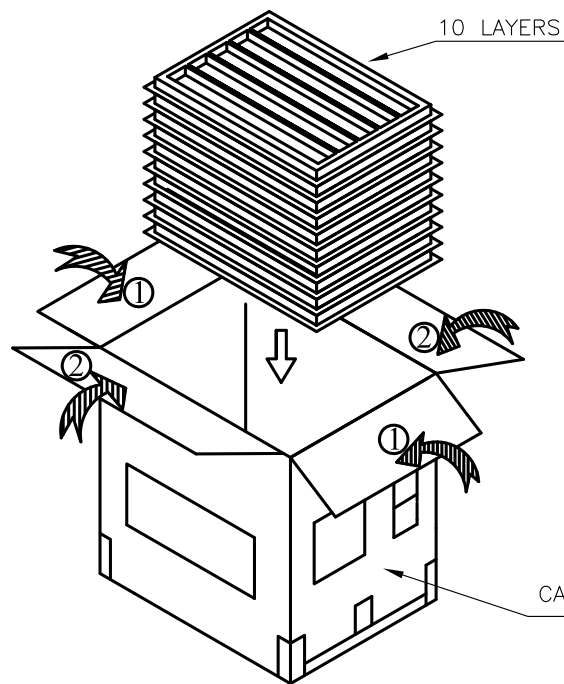

NOTES:

1. DIMENSION:
TRAY: L=350, W=250, H=21.5
SHIPPING CARTON: L=360, W=260, H=220
2. QUANTITY: (SEE TABLE)
3. CARTON WEIGHT: (SEE TABLE)

PACKING(Tray)


	SEE SHEET 1.	--		
LTR	REVISION RECORD	ECN	DWN	CHK
				DATE

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN	bin	
0 PLC ±			03-DEC-2020	
1 PLC ± 0.30		CHK		
2 PLC ± 0.20				
3 PLC ± 0.15				
ANGLES ± 3°				
MATERIAL		APVD	NAME	
SEE NOTE		PRODUCT SPEC		
FINISH		QUALIFICATION TEST REPORT	LOC	SIZE
SEE NOTE		WEIGHT	DW	A4
			SCALE	DRAWING NO
				C071141
				REV
				A0
				SHEET

7.50	6.50	100	10	1000
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAYS/CARTON	PCS/CARTON




USB 3.0 A TYPE DIP
双层沉板式(一体式铁壳)

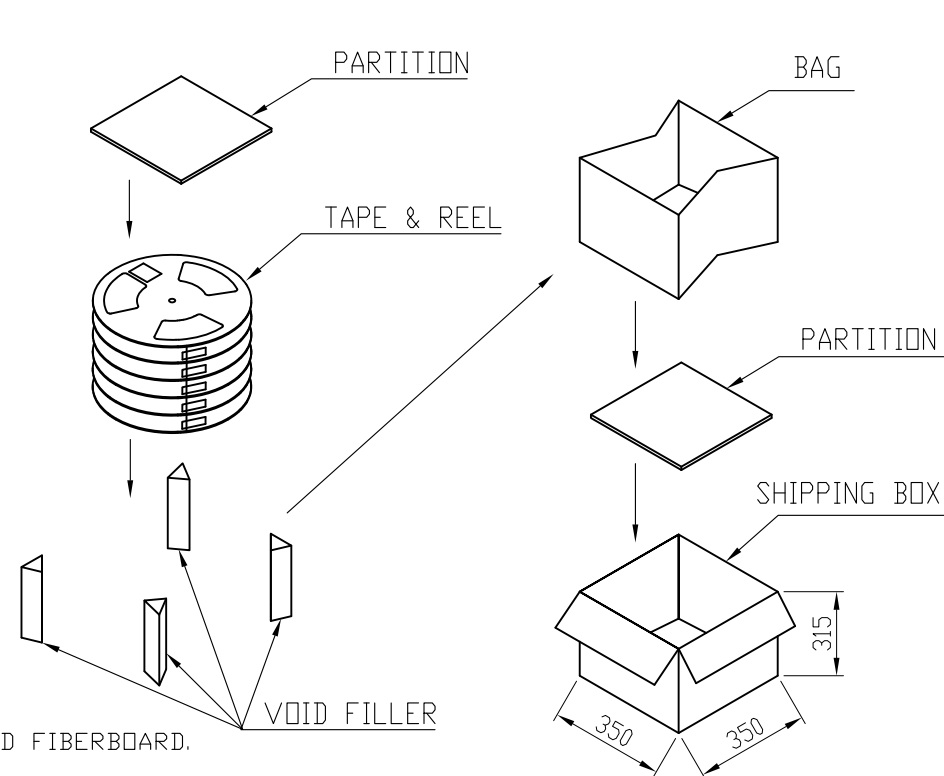

1. MATERIAL:
CARRIER TAPE: PS.
COVER TAPE: PET.
REEL: PS.
SHIPPING BOX: CORRUGATED FIBERBOARD.
2. DIMENSION:
REEL: $\phi = 330$.
SHIPPING BOX: L=350, W=350, H=315.
3. QUANTITY: SEE TABLE.
4. SHIPPING BOX WEIGHT: SEE TABLE.
5. PEELING STRENGTH: 0.1~1.3N(10~130 GRAMS)
6. PEELING SPEED: 300mm/min.



120	6	720	6.18	4.68
PCS/ REEL	REELS/ CARTON	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)

TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ± 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 ANGLES ± 3°	DWN	bin 03-DEC-2020			
	CHK	NAME			
MATERIAL SEE NOTE	APVD	USB 3.0 A TYPE DIP 双层沉板式(一体式铁壳)			
	PRODUCT SPEC				
FINISH SEE NOTE	QUALIFICATION TEST REPORT	LOC DW	SIZE A4	DRAWING NO C071141	REV A
	WEIGHT	SCALE --		SHEET	