ZONE	SYMBOL	REVISION	APPROVAL	DATE

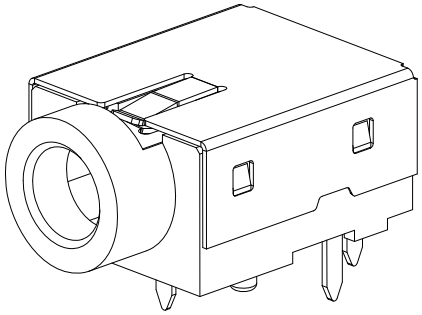

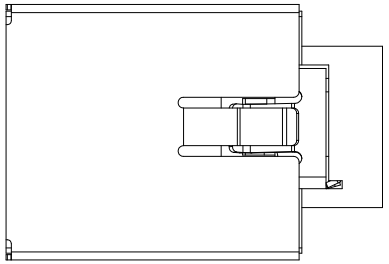

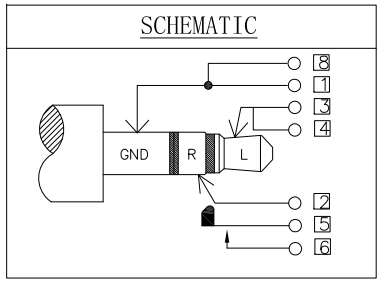

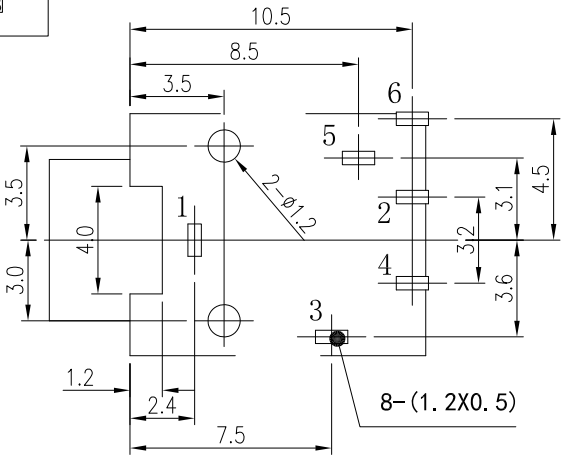



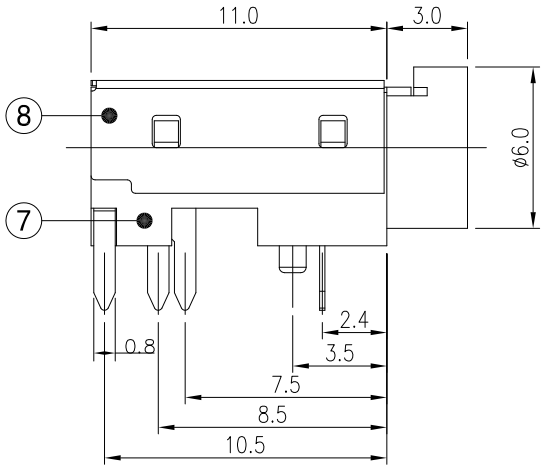

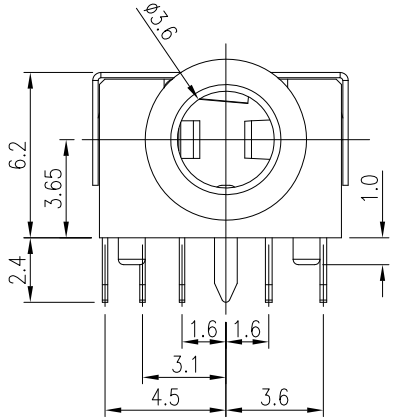

C1324B 08DX PPA
- B:BLACK
- P:PINK(#199C)
- G:GREEN(#577C)

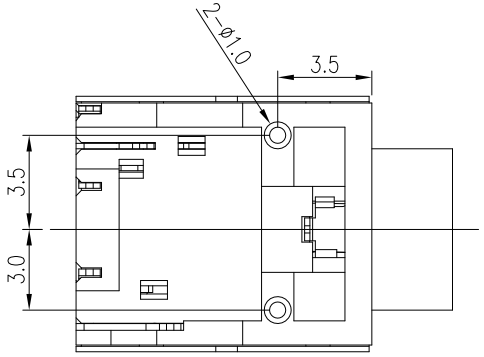

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: ≤0.03Ω;
3. Insulation resistance: ≥100MΩ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles。

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
8	SHELL	1	SUS	
7	HOUSING	1	PA9T+30%GF, UL94 V-0	
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Matte Sn-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Matte Sn-Plating
4	CURVE PIECE	1	PHOSPHOR BRONZE	Matte Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Matte Sn-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Matte Sn-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Matte Sn-Plating

UNLESS OTHERWISE SOECIFIED
DIMENSION ARE IN CENTIMETERS
TOLERANCE ARE :
FRACTION DECIMALs ANGLEs

.X	± 0.3	X°	±5°
.XX	± 0.2	.X°	±3°
.XXX	± 0.1		

3rd ANGLE PROJECTION

SCALE 1:1 | UNIT mm | SIZE A4

CONSHARE

APPROVALS	DATE
DRAWN WANGWEI	2012/10/10
CHECKED JACK	2012/10/10
APPROVED TIRE	2012/10/10

TITLE: 3.5mm AUDIO JACK

PART NO. C1324B08DXPPA